

GLI 2.5

Big face fix hangers interior flange - 2.5 mm

Big face hangers external or internal flange are recommended in a number of applications. They are used to assemble a structure effectively without custom machining and thus enhance structural reliability. Similarly, with a large number of applications, these versatile products have today become essential in construction. This new profile allows greater versatility particularly in terms of bending width. It is also designed to be fully compatible with Simpson Strong-Tie anchors and thus facilitate fastening on concrete substrate.

Features

Materiál

- S250GD + Z275 according to NF EN 10346.
- Thickness: 2.5 mm.

Vorteile

- Quick and simple installation
- Great adaptivness
- Facilitate connection on concrete support


Applications

Support

- **Supporting member:** solid wood, composite lumber, glued-laminated wood, steel, concrete.
- **Supported member:** solid wood, composite lumber, glued-laminated wood, triangular trusses, profiles, etc.

Anwendungsbereich

- Joists, purlins.
- Cladding plates and uprights.
- Rafter ends.
- Refurbishment of existing assemblies, etc.




Clouage total sur bois

GLI 2.5
Big face fix hangers interior flange - 2.5 mm

Technical Data

Product range dimensions

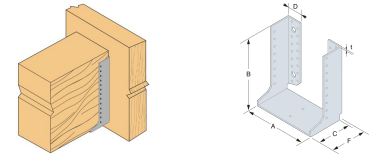



Clouage total sur bois

Art. nr.	Blank model [mm]	A	B	C
GLI500/2.5X	500	76-160	$(500-A)/2$	90
GLI540/2.5X	540	76-160	$(540-A)/2$	90
GLI600/2.5X	600	76-160	$(600-A)/2$	90
GLI660/2.5X	660	76-160	$(660-A)/2$	90
GLI720/2.5X	720	76-160	$(720-A)/2$	90

For more information on the load values according to the width of the joist hanger, contact the technical department.

GLI 2.5

Big face fix hangers interior flange - 2.5 mm



Rozměry a typické hodnoty

Clouage total sur bois

Art. nr.	Rozměry vedlejšího nosníku [mm]				Rozměry a typické hodnoty [mm]							Otvory hlavy		Otvory trámu
	Šířka		Výška [mm]		A	B	C	D	F	t	Ø5	Ø13	Ø5	
	Výška [mm]	Max.	Výška [mm]	Max.										
GLI540/80/2.5	78	80	240	345	80	230	90	38.5	95	2.5	30	4	17	
GLI600/80/2.5	78	80	270	390	80	260	90	38.5	95	2.5	36	4	20	
GLI660/80/2.5	78	80	300	435	80	290	90	38.5	95	2.5	40	6	23	
GLI720/80/2.5	78	80	330	480	80	320	90	38.5	95	2.5	46	6	26	
GLI780/80/2.5	78	80	360	525	80	350	90	38.5	95	2.5	48	6	29	
GLI840/80/2.5	78	80	390	570	80	380	90	38.5	95	2.5	54	6	32	
GLI900/80/2.5	78	80	420	615	80	410	90	38.5	95	2.5	60	6	35	
GLI960/80/2.5	78	80	450	660	80	440	90	38.5	95	2.5	64	8	38	
GLI1020/80/2.5	78	80	480	705	80	470	90	38.5	95	2.5	70	8	41	
GLI540/90/2.5	88	90	235	337	90	225	90	38.5	95	2.5	30	4	17	
GLI600/90/2.5	88	90	265	382	90	255	90	38.5	95	2.5	36	4	20	
GLI660/90/2.5	88	90	295	427	90	285	90	38.5	95	2.5	40	6	23	
GLI720/90/2.5	88	90	325	472	90	315	90	38.5	95	2.5	46	6	26	
GLI780/90/2.5	88	90	355	517	90	345	90	38.5	95	2.5	48	6	29	
GLI840/90/2.5	88	90	385	562	90	375	90	38.5	95	2.5	54	6	32	
GLI900/90/2.5	88	90	415	607	90	405	90	38.5	95	2.5	60	6	35	
GLI960/90/2.5	88	90	445	652	90	435	90	38.5	95	2.5	64	8	38	
GLI1020/90/2.5	88	90	475	697	90	465	90	38.5	95	2.5	70	8	41	
GLI540/100/2.5	98	100	230	330	100	220	90	38.5	95	2.5	30	4	17	
GLI600/100/2.5	98	100	260	375	100	250	90	38.5	95	2.5	36	4	20	
GLI660/100/2.5	98	100	290	420	100	280	90	38.5	95	2.5	40	6	23	
GLI720/100/2.5	98	100	320	465	100	310	90	38.5	95	2.5	46	6	26	
GLI780/100/2.5	98	100	350	510	100	340	90	38.5	95	2.5	48	6	29	
GLI840/100/2.5	98	100	380	555	100	370	90	38.5	95	2.5	54	6	32	
GLI900/100/2.5	98	100	410	600	100	400	90	38.5	95	2.5	60	6	35	
GLI960/100/2.5	98	100	440	645	100	430	90	38.5	95	2.5	64	8	38	
GLI1020/100/2.5	98	100	470	690	100	460	90	38.5	95	2.5	70	8	41	
GLI540/120/2.5	118	120	220	315	120	210	90	38.5	95	2.5	30	4	17	
GLI600/120/2.5	118	120	250	360	120	240	90	38.5	95	2.5	36	4	20	
GLI660/120/2.5	118	120	280	405	120	270	90	38.5	95	2.5	40	6	23	
GLI720/120/2.5	118	120	310	450	120	300	90	38.5	95	2.5	46	6	26	
GLI780/120/2.5	118	120	340	495	120	330	90	38.5	95	2.5	48	6	29	
GLI840/120/2.5	118	120	370	540	120	360	90	38.5	95	2.5	54	6	32	
GLI900/120/2.5	118	120	400	585	120	390	90	38.5	95	2.5	60	6	35	
GLI960/120/2.5	118	120	430	630	120	420	90	38.5	95	2.5	64	8	38	
GLI1020/120/2.5	118	120	460	675	120	450	90	38.5	95	2.5	70	8	41	
GLI540/140/2.5	138	140	210	300	140	200	90	38.5	95	2.5	30	4	17	
GLI600/140/2.5	138	140	240	345	140	230	90	38.5	95	2.5	36	4	20	
GLI660/140/2.5	138	140	270	390	140	260	90	38.5	95	2.5	40	6	23	
GLI720/140/2.5	138	140	300	435	140	290	90	38.5	95	2.5	46	6	26	
GLI780/140/2.5	138	140	330	480	140	320	90	38.5	95	2.5	48	6	29	
GLI840/140/2.5	138	140	360	525	140	350	90	38.5	95	2.5	54	6	32	
GLI900/140/2.5	138	140	390	570	140	380	90	38.5	95	2.5	60	6	35	

GLI 2.5

Big face fix hangers interior flange - 2.5 mm

Art. nr.	Rozměry vedlejšího nosníku [mm]				Rozměry a typické hodnoty [mm]							Otvory hlavy		Otvory trámu
	Šířka		Výška [mm]		A	B	C	D	F	t	Ø5	Ø13	Ø5	
	Výška [mm]	Max.	Výška [mm]	Max.										
GLI960/140/2.5	138	140	420	615	140	410	90	38.5	95	2.5	64	8	38	
GLI1020/140/2.5	138	140	450	660	140	440	90	38.5	95	2.5	70	8	41	
GLI500/160/2.5	158	160	180	255	160	170	90	38.5	95	2.5	26	4	15	
GLI540/160/2.5	158	160	200	285	160	190	90	38.5	95	2.5	30	4	17	
GLI600/160/2.5	158	160	230	330	160	220	90	38.5	95	2.5	36	4	20	
GLI660/160/2.5	158	160	260	375	160	250	90	38.5	95	2.5	40	6	23	
GLI720/160/2.5	158	160	290	420	160	280	90	38.5	95	2.5	46	6	26	
GLI780/160/2.5	158	160	320	465	160	310	90	38.5	95	2.5	48	6	29	
GLI840/160/2.5	158	160	350	510	160	340	90	38.5	95	2.5	54	6	32	
GLI900/160/2.5	158	160	380	555	160	370	90	38.5	95	2.5	60	6	35	
GLI960/160/2.5	158	160	410	600	160	400	90	38.5	95	2.5	64	8	38	
GLI1020/160/2.5	158	160	440	645	160	430	90	38.5	95	2.5	70	8	41	
GLI500/180/2.5	178	180	170	240	180	160	90	38.5	95	2.5	18	4	13	
GLI540/180/2.5	178	180	190	270	180	180	90	38.5	95	2.5	18	4	13	
GLI600/180/2.5	178	180	220	315	180	210	90	38.5	95	2.5	24	4	16	
GLI660/180/2.5	178	180	250	360	180	240	90	38.5	95	2.5	28	6	19	
GLI720/180/2.5	178	180	280	405	180	270	90	38.5	95	2.5	34	6	22	
GLI780/180/2.5	178	180	310	450	180	300	90	38.5	95	2.5	40	6	25	
GLI840/180/2.5	178	180	340	495	180	330	90	38.5	95	2.5	46	6	28	
GLI900/180/2.5	178	180	370	540	180	360	90	38.5	95	2.5	52	6	31	
GLI960/180/2.5	178	180	400	585	180	390	90	38.5	95	2.5	58	6	34	
GLI1020/180/2.5	178	180	430	630	180	420	90	38.5	95	2.5	62	8	37	
GLI500/200/2.5	198	200	160	225	200	150	90	38.5	95	2.5	18	4	13	
GLI540/200/2.5	198	200	180	255	200	170	90	38.5	95	2.5	18	4	13	
GLI600/200/2.5	198	200	210	300	200	200	90	38.5	95	2.5	24	4	16	
GLI660/200/2.5	198	200	240	345	200	230	90	38.5	95	2.5	28	6	19	
GLI720/200/2.5	198	200	270	390	200	260	90	38.5	95	2.5	34	6	22	
GLI780/200/2.5	198	200	300	435	200	290	90	38.5	95	2.5	40	6	25	
GLI840/200/2.5	198	200	330	480	200	320	90	38.5	95	2.5	46	6	28	
GLI900/200/2.5	198	200	360	525	200	350	90	38.5	95	2.5	52	6	31	
GLI960/200/2.5	198	200	390	570	200	380	90	38.5	95	2.5	58	6	34	
GLI1020/200/2.5	198	200	420	615	200	410	90	38.5	95	2.5	62	8	37	
GLI540/220/2.5	218	220	170	240	220	160	90	38.5	95	2.5	18	4	13	
GLI600/220/2.5	218	220	200	285	220	190	90	38.5	95	2.5	24	4	16	
GLI660/220/2.5	218	220	230	330	220	220	90	38.5	95	2.5	28	6	19	
GLI720/220/2.5	218	220	260	375	220	250	90	38.5	95	2.5	34	6	22	
GLI780/220/2.5	218	220	290	420	220	280	90	38.5	95	2.5	40	6	25	
GLI840/220/2.5	218	220	320	465	220	310	90	38.5	95	2.5	46	6	28	
GLI900/220/2.5	218	220	350	510	220	340	90	38.5	95	2.5	52	6	31	
GLI960/220/2.5	218	220	380	555	220	370	90	38.5	95	2.5	58	6	34	
GLI1020/220/2.5	218	220	410	600	220	400	90	38.5	95	2.5	62	8	37	
GLI540/240/2.5	238	240	160	225	240	150	90	38.5	95	2.5	18	4	13	
GLI600/240/2.5	238	240	190	270	240	180	90	38.5	95	2.5	24	4	16	
GLI660/240/2.5	238	240	220	315	240	210	90	38.5	95	2.5	28	6	19	
GLI720/240/2.5	238	240	250	360	240	240	90	38.5	95	2.5	34	6	22	
GLI780/240/2.5	238	240	280	405	240	270	90	38.5	95	2.5	40	6	25	
GLI840/240/2.5	238	240	310	450	240	300	90	38.5	95	2.5	46	6	28	
GLI900/240/2.5	238	240	340	495	240	330	90	38.5	95	2.5	52	6	31	

Technický list

SIMPSON**Strong-Tie**


GLI 2.5

Big face fix hangers interior flange - 2.5 mm

Art. nr.	Rozměry vedlejšího nosníku [mm]				Rozměry a typické hodnoty [mm]							Otvory hlavy		Otvory trámu
	Šířka		Výška [mm]		A	B	C	D	F	t	Ø5	Ø13	Ø5	
	Výška [mm]	Max.	Výška [mm]	Max.										
GLI960/240/2.5	238	240	370	540	240	360	90	38.5	95	2.5	58	6	34	
GLI1020/240/2.5	238	240	400	585	240	390	90	38.5	95	2.5	62	8	37	

GLI 2.5 Big face fix hangers interior flange - 2.5 mm

Charakteristické nosnosti - Dřevěný trám na dřevěný trám - plné hřebování

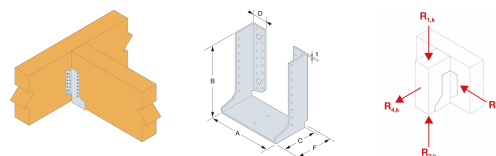

Art. nr.	Charakteristické nosnosti - Dřevěný trám na dřevěný trám - plné hřebování					
	Upevňovací prvky		Charakteristické kapacity - dřevo C24 [kN]			
	Hlava	Trám	$R_{1,k}$	$R_{2,k}$	$R_{3,k}$	$R_{4,k}$
	Množství	Množství	CNA4.0x50	CNA4.0x50	CNA4.0x50	CNA4.0x50
GLI540/80/2.5	30	17	37.2	33.5	8.5	13.7
GLI600/80/2.5	36	20	43.8	39.4	8.9	15.7
GLI660/80/2.5	40	23	50.4	45.3	9.2	17.6
GLI720/80/2.5	46	26	56.9	51.2	9.5	19.6
GLI780/80/2.5	48	29	63.5	57.2	10	21.6
GLI840/80/2.5	54	32	70.1	63.1	10.1	23.5
GLI900/80/2.5	60	35	76.7	69	10.2	27.4
GLI960/80/2.5	64	38	83.2	74.9	10.3	27.4
GLI1020/80/2.5	70	41	89.8	80.8	10.3	31.4
GLI540/90/2.5	30	17	37.2	33.5	9.3	13.7
GLI600/90/2.5	36	20	43.8	39.4	9.8	15.7
GLI660/90/2.5	40	23	50.4	45.3	10.2	17.6
GLI720/90/2.5	46	26	56.9	51.2	10.5	19.6
GLI780/90/2.5	48	29	63.5	57.2	11.1	21.6
GLI840/90/2.5	54	32	70.1	63.1	11.3	23.5
GLI900/90/2.5	60	35	76.7	69	11.4	27.4
GLI960/90/2.5	64	38	83.2	74.9	11.5	27.4
GLI1020/90/2.5	70	41	89.8	80.8	11.6	31.4
GLI540/100/2.5	30	17	37.2	33.5	10	13.7
GLI600/100/2.5	36	20	43.8	39.4	10.7	15.7
GLI660/100/2.5	40	23	50.4	45.3	11.1	17.6
GLI720/100/2.5	46	26	56.9	51.2	11.5	19.6
GLI780/100/2.5	48	29	63.5	57.2	12.2	21.6
GLI840/100/2.5	54	32	70.1	63.1	12.4	23.5
GLI900/100/2.5	60	35	76.7	69	12.6	27.4
GLI960/100/2.5	64	38	83.2	74.9	12.7	27.4
GLI1020/100/2.5	70	41	89.8	80.8	12.8	31.4
GLI540/120/2.5	30	17	37.2	33.5	11.3	13.7
GLI600/120/2.5	36	20	43.8	39.4	12.2	15.7
GLI660/120/2.5	40	23	50.4	45.3	12.8	17.6
GLI720/120/2.5	46	26	56.9	51.2	13.4	19.6
GLI780/120/2.5	48	29	63.5	57.2	14.3	21.6
GLI840/120/2.5	54	32	70.1	63.1	14.6	23.5
GLI900/120/2.5	60	35	76.7	69	14.8	27.4
GLI960/120/2.5	64	38	83.2	74.9	15	27.4
GLI1020/120/2.5	70	41	89.8	80.8	15.1	31.4
GLI540/140/2.5	30	17	37.2	33.5	12.3	13.7
GLI600/140/2.5	36	20	43.8	39.4	13.5	15.7
GLI660/140/2.5	40	23	50.4	45.3	14.3	17.6
GLI720/140/2.5	46	26	56.9	51.2	15.1	19.6

A, B a C jsou vnitřní rozměry trámové botky.

GLI 2.5

Big face fix hangers interior flange - 2.5 mm

Art. nr.	Charakteristické nosnosti - Dřevěný trám na dřevěný trám - plné hřebování					
	Upevňovací prvky		Charakteristické kapacity - dřevo C24 [kN]			
	Hlava	Trám	R _{1,k}	R _{2,k}	R _{3,k}	R _{4,k}
	Množství	Množství	CNA4.0x50	CNA4.0x50	CNA4.0x50	CNA4.0x50
GLI780/140/2.5	48	29	63.5	57.2	16.1	21.6
GLI840/140/2.5	54	32	70.1	63.1	16.5	23.5
GLI900/140/2.5	60	35	76.7	69	16.8	27.4
GLI960/140/2.5	64	38	83.2	74.9	17.1	27.4
GLI1020/140/2.5	70	41	89.8	80.8	17.4	31.4
GLI500/160/2.5	26	15	32.9	29.1	12.1	11.8
GLI540/160/2.5	30	17	37.2	33.5	13.2	13.7
GLI600/160/2.5	36	20	43.8	39.4	14.5	15.7
GLI660/160/2.5	40	23	50.4	45.3	15.6	17.6
GLI720/160/2.5	46	26	56.9	51.2	16.5	19.6
GLI780/160/2.5	48	29	63.5	57.2	17.7	21.6
GLI840/160/2.5	54	32	70.1	63.1	18.3	23.5
GLI900/160/2.5	60	35	76.7	69	18.7	27.4
GLI960/160/2.5	64	38	83.2	74.9	19.1	27.4
GLI1020/160/2.5	70	41	89.8	80.8	19.5	31.4
GLI500/180/2.5	18	13	26	16.9	11.4	7.8
GLI540/180/2.5	18	13	28.5	16.9	11.3	7.8
GLI600/180/2.5	24	16	35	25.9	13.2	9.8
GLI660/180/2.5	28	19	41.6	34.3	14.8	11.8
GLI720/180/2.5	34	22	48.2	43.4	16.2	13.7
GLI780/180/2.5	40	25	54.8	49.3	17.3	17.6
GLI840/180/2.5	46	28	61.3	55.2	18.3	19.6
GLI900/180/2.5	52	31	67.9	61.1	19	23.5
GLI960/180/2.5	58	34	74.5	67	19.7	25.5
GLI1020/180/2.5	62	37	81	72.9	20.2	27.4
GLI500/200/2.5	18	13	24.1	16.9	11.7	7.8
GLI540/200/2.5	18	13	27.7	16.9	11.6	7.8
GLI600/200/2.5	24	16	35	25.9	13.7	9.8
GLI660/200/2.5	28	19	41.6	34.3	15.5	11.8
GLI720/200/2.5	34	22	48.2	43.4	17.1	13.7
GLI780/200/2.5	40	25	54.8	49.3	18.3	17.6
GLI840/200/2.5	46	28	61.3	55.2	19.4	19.6
GLI900/200/2.5	52	31	67.9	61.1	20.3	23.5
GLI960/200/2.5	58	34	74.5	67	21.2	25.5
GLI1020/200/2.5	62	37	81	72.9	21.8	27.4
GLI540/220/2.5	18	13	26	16.9	11.8	7.8
GLI600/220/2.5	24	16	35	25.9	14	9.8
GLI660/220/2.5	28	19	41.6	34.3	16	11.8
GLI720/220/2.5	34	22	48.2	43.4	17.7	13.7
GLI780/220/2.5	40	25	54.8	49.3	19.2	17.6
GLI840/220/2.5	46	28	61.3	55.2	20.5	19.6
GLI900/220/2.5	52	31	67.9	61.1	21.5	23.5
GLI960/220/2.5	58	34	74.5	67	22.5	25.5
GLI1020/220/2.5	62	37	81	72.9	23.3	27.4
GLI540/240/2.5	18	13	24.1	16.9	12	7.8

A, B a C jsou vnitřní rozměry trámové botky.


GLI 2.5
Big face fix hangers interior flange - 2.5 mm

Art. nr.	Charakteristické nosnosti - Dřevěný trám na dřevěný trám - plné hřebování					
	Upevňovací prvky		Charakteristické kapacity - dřevo C24 [kN]			
	Hlava	Trám	R _{1,k}	R _{2,k}	R _{3,k}	R _{4,k}
	Množství	Množství	CNA4.0x50	CNA4.0x50	CNA4.0x50	CNA4.0x50
GLI600/240/2.5	24	16	34.7	25.9	14.3	9.8
GLI660/240/2.5	28	19	41.6	34.3	16.4	11.8
GLI720/240/2.5	34	22	48.2	43.4	18.3	13.7
GLI780/240/2.5	40	25	54.8	49.3	19.9	17.6
GLI840/240/2.5	46	28	61.3	55.2	21.4	19.6
GLI900/240/2.5	52	31	67.9	61.1	22.6	23.5
GLI960/240/2.5	58	34	74.5	67	23.7	25.5
GLI1020/240/2.5	62	37	81	72.9	24.6	27.4

A, B a C jsou vnitřní rozměry trámové botky.

GLI 2.5 Big face fix hangers interior flange - 2.5 mm

Nosnosti - dřevo na dřevo - dílčí hřebování

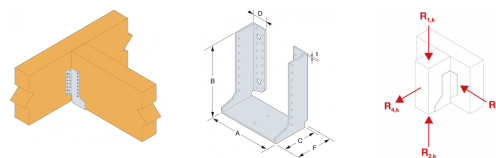

Art. nr.	Nosnosti - dřevo na dřevo - dílčí hřebování					
	Upevňovací prvky		Charakteristické kapacity - dřevo C24 [kN]			
	Hlava	Trám	$R_{1,k}$	$R_{2,k}$	$R_{3,k}$	$R_{4,k}$
	Množství	Množství	CNA4.0x50	CNA4.0x50	CNA4.0x50	CNA4.0x50
GLI540/80/2.5	14	9	19.7	16.9	4.5	13.7
GLI600/80/2.5	16	10	21.9	19.7	4.5	15.7
GLI660/80/2.5	18	12	26.3	23.7	4.8	17.6
GLI720/80/2.5	20	14	30.7	27.6	5.2	19.6
GLI780/80/2.5	22	15	32.9	29.6	5.2	21.6
GLI840/80/2.5	24	16	35	31.5	5.2	23.5
GLI900/80/2.5	28	18	39.4	35.5	5.3	27.4
GLI960/80/2.5	28	20	43.8	39.4	5.5	27.4
GLI1020/80/2.5	32	21	46	41.4	5.3	31.4
GLI540/90/2.5	14	9	19.7	16.9	4.9	13.7
GLI600/90/2.5	16	10	21.9	19.7	5	15.7
GLI660/90/2.5	18	12	26.3	23.7	5.3	17.6
GLI720/90/2.5	20	14	30.7	27.6	5.8	19.6
GLI780/90/2.5	22	15	32.9	29.6	5.8	21.6
GLI840/90/2.5	24	16	35	31.5	5.8	23.5
GLI900/90/2.5	28	18	39.4	35.5	5.9	27.4
GLI960/90/2.5	28	20	43.8	39.4	6.1	27.4
GLI1020/90/2.5	32	21	46	41.4	5.9	31.4
GLI540/100/2.5	14	9	19.7	16.9	5.3	13.7
GLI600/100/2.5	16	10	21.9	19.7	5.4	15.7
GLI660/100/2.5	18	12	26.3	23.7	5.8	17.6
GLI720/100/2.5	20	14	30.7	27.6	6.3	19.6
GLI780/100/2.5	22	15	32.9	29.6	6.4	21.6
GLI840/100/2.5	24	16	35	31.5	6.3	23.5
GLI900/100/2.5	28	18	39.4	35.5	6.5	27.4
GLI960/100/2.5	28	20	43.8	39.4	6.8	27.4
GLI1020/100/2.5	32	21	46	41.4	6.6	31.4
GLI540/120/2.5	14	9	19.7	16.9	6	13.7
GLI600/120/2.5	16	10	21.9	19.7	6.2	15.7
GLI660/120/2.5	18	12	26.3	23.7	6.7	17.6
GLI720/120/2.5	20	14	30.7	27.6	7.3	19.6
GLI780/120/2.5	22	15	32.9	29.6	7.4	21.6
GLI840/120/2.5	24	16	35	31.5	7.4	23.5
GLI900/120/2.5	28	18	39.4	35.5	7.6	27.4
GLI960/120/2.5	28	20	43.8	39.4	8	27.4
GLI1020/120/2.5	32	21	46	41.4	7.8	31.4
GLI540/140/2.5	14	9	19.7	16.9	6.5	13.7
GLI600/140/2.5	16	10	21.9	19.7	6.8	15.7
GLI660/140/2.5	18	12	26.3	23.7	7.5	17.6
GLI720/140/2.5	20	14	30.7	27.6	8.2	19.6

A, B a C jsou vnitřní rozměry trámové botky.

GLI 2.5

Big face fix hangers interior flange - 2.5 mm

Art. nr.	Nosnosti - dřevo na dřevo - dílčí hřebování					
	Upevňovací prvky		Charakteristické kapacity - dřevo C24 [kN]			
	Hlava	Trám	R _{1,k}	R _{2,k}	R _{3,k}	R _{4,k}
	Množství	Množství	CNA4.0x50	CNA4.0x50	CNA4.0x50	CNA4.0x50
GLI780/140/2.5	22	15	32.9	29.6	8.4	21.6
GLI840/140/2.5	24	16	35	31.5	8.4	23.5
GLI900/140/2.5	28	18	39.4	35.5	8.7	27.4
GLI960/140/2.5	28	20	43.8	39.4	9.1	27.4
GLI1020/140/2.5	32	21	46	41.4	8.9	31.4
GLI500/160/2.5	12	8	16.1	13.6	6.5	11.8
GLI540/160/2.5	14	9	19.7	16.9	7	13.7
GLI600/160/2.5	16	10	21.9	19.7	7.3	15.7
GLI660/160/2.5	18	12	26.3	23.7	8.1	17.6
GLI720/160/2.5	20	14	30.7	27.6	9	19.6
GLI780/160/2.5	22	15	32.9	29.6	9.2	21.6
GLI840/160/2.5	24	16	35	31.5	9.3	23.5
GLI900/160/2.5	28	18	39.4	35.5	9.7	27.4
GLI960/160/2.5	28	20	43.8	39.4	10.2	27.4
GLI1020/160/2.5	32	21	46	41.4	10	31.4
GLI500/180/2.5	8	7	12.4	7.7	6.2	7.8
GLI540/180/2.5	8	7	13.6	7.7	6.1	7.8
GLI600/180/2.5	10	8	17.5	10.7	6.7	9.8
GLI660/180/2.5	12	10	21.3	15.1	7.8	11.8
GLI720/180/2.5	14	12	25.8	18.4	9	13.7
GLI780/180/2.5	18	13	28.5	25.6	9	17.6
GLI840/180/2.5	20	14	30.7	27.6	9.2	19.6
GLI900/180/2.5	24	16	35	31.5	9.8	23.5
GLI960/180/2.5	26	18	39.4	35.5	10.6	25.5
GLI1020/180/2.5	28	19	41.6	37.4	10.4	27.4
GLI500/200/2.5	8	7	11.6	7.7	6.3	7.8
GLI540/200/2.5	8	7	13.1	7.7	6.3	7.8
GLI600/200/2.5	10	8	17.2	10.7	6.9	9.8
GLI660/200/2.5	12	10	20.7	15.1	8.2	11.8
GLI720/200/2.5	14	12	25.2	18.4	9.4	13.7
GLI780/200/2.5	18	13	28.5	25.6	9.6	17.6
GLI840/200/2.5	20	14	30.7	27.6	9.8	19.6
GLI900/200/2.5	24	16	35	31.5	10.5	23.5
GLI960/200/2.5	26	18	39.4	35.5	11.3	25.5
GLI1020/200/2.5	28	19	41.6	37.4	11.2	27.4
GLI540/220/2.5	8	7	12.4	7.7	6.4	7.8
GLI600/220/2.5	10	8	16.5	10.7	7.1	9.8
GLI660/220/2.5	12	10	20	15.1	8.4	11.8
GLI720/220/2.5	14	12	24.6	18.4	9.8	13.7
GLI780/220/2.5	18	13	28.5	25.6	10	17.6
GLI840/220/2.5	20	14	30.7	27.6	10.3	19.6
GLI900/220/2.5	24	16	35	31.5	11.1	23.5
GLI960/220/2.5	26	18	39.4	35.5	12.1	25.5
GLI1020/220/2.5	28	19	41.6	37.4	12	27.4
GLI540/240/2.5	8	7	11.6	7.7	6.5	7.8

A, B a C jsou vnitřní rozměry trámové botky.

GLI 2.5
Big face fix hangers interior flange - 2.5 mm

Art. nr.	Nosnosti - dřevo na dřevo - dílčí hřebování					
	Upevňovací prvky		Charakteristické kapacity - dřevo C24 [kN]			
	Hlava	Trám	R _{1,k}	R _{2,k}	R _{3,k}	R _{4,k}
	Množství	Množství	CNA4.0x50	CNA4.0x50	CNA4.0x50	CNA4.0x50
GLI600/240/2.5	10	8	15.8	10.7	7.2	9.8
GLI660/240/2.5	12	10	19.2	15.1	8.7	11.8
GLI720/240/2.5	14	12	23.9	18.4	10.1	13.7
GLI780/240/2.5	18	13	28.5	25.6	10.4	17.6
GLI840/240/2.5	20	14	30.7	27.6	10.8	19.6
GLI900/240/2.5	24	16	35	31.5	11.7	23.5
GLI960/240/2.5	26	18	39.4	35.5	12.7	25.5
GLI1020/240/2.5	28	19	41.6	37.4	12.6	27.4

A, B a C jsou vnitřní rozměry trámové botky.

GLI 2.5

Big face fix hangers interior flange - 2.5 mm

Installation

Befestigung

On supported member:

- CNA annular ring-shank nails dia. 4.0 x 50 mm.
- CNA annular ring-shank nails dia. 4.0 x 35 mm for thickness less than 64 mm.
- CSA screws dia. 5.0 x 40 mm.
- CSA screws dia. 5.0 x 35 mm for thickness less than 60 mm.

On supporting member:


Wood substrate:

- CNA annular ring-shank nails dia. 4.0 x 50 mm.
- CNA annular ring-shank nails dia. 4.0 x 35 mm for thickness less than 64 mm.
- CSA screws dia. 5.0 x 40 mm.
- CSA screws dia. 5.0 x 35 mm for thickness less than 60 mm.

Steel substrate:

- Bolts dia. 12 mm (bolt diameter cannot be more than 2 mm smaller than the drill hole diameter).

ATTENTION: Joist hangers internal flange are not recommended on concrete and masonry substrate.



Clouage total sur bois

GLI 2.5

Big face fix hangers interior flange - 2.5 mm