

## SSH Hexagon Head Connector Screw Impreg®+

SSH is used together with connectors where high load capability is required. The conical shape under the head makes a perfect fitting to the connector hole, creating a firm assembly. Suitable for exterior use. The cut point type 17 prevents cracking, and the milling thread and serrated thread reduce the insertion torque. SSH has both 6 lobe drive and a hexagonal head, enabling mounting both with bits or with sleeves.

### Features

#### Material

- Impreg®+ coating

#### Benefits

- Hex head with integrated 6 lobe drive
- Cone for maximum fit
- Milling thread
- Serrated coarse thread
- Type 17 point

### Applications

#### Assemblies

- Connectors to wood

#### When to use

- Suitable for outdoor applications





SSH6.0X40



SSH8.0X80





SSH10.0X60



SSH  
Hexagon Head Connector Screw Impreg®+


## Technical Data

Product dimensions

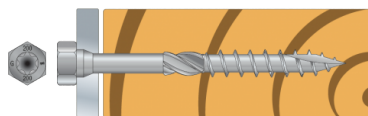

Art. nr.	Item code	Gunnebo art. nr.	Fastener dimensions [mm]							bit	Qty per blister	Qty per box	
			d	l	d <sub>h</sub>	h <sub>t</sub>	d <sub>uh</sub>	d <sub>f</sub>	l <sub>g</sub>				
SSH8.0X40	75134	71688	8	40	13	5.75	8.2	5.1	32	T-40	-	50	
SSH8.0X50	75135	71689		50	13	5.75	8.2	5.1	42	T-40	-	50	
SSH8.0X60	75136	71690		60	13	5.75	8.2	5.1	42	T-40	-	50	
SSH8.0X80	75137	71691		80	13	5.75	8.2	5.1	42	T-40	-	50	
SSH8.0X90	75138	71692		90	13	5.75	8.2	5.1	42	T-40	-	50	
SSH8.0X100	75139	71609		100	13	5.75	8.2	5.1	55	T-40	-	50	
SSH8.0X120	75140	76762		120	13	5.75	8.2	5.1	85	T-40	-	50	
SSH8.0X140	75141	71701		140	13	5.75	8.2	5.1	85	T-40	-	50	
SSH8.0X160	75142	73255		160	13	5.75	8.2	5.1	110	T-40	-	50	
SSH8.0X180	75143	73256		180	13	5.75	8.2	5.1	110	T-40	-	50	
SSH8.0X200	75144	73257		200	13	5.75	8.2	5.1	110	T-40	-	50	
SSH8.0X240	75145	73258		240	13	5.75	8.2	5.1	110	T-40	-	50	
SSH8.0X260	75146	73212		260	13	5.75	8.2	5.1	110	T-40	-	50	
SSH8.0X280	75147	73213		280	13	5.75	8.2	5.1	110	T-40	-	50	
SSH8.0X300	75148	73214	300	13	5.75	8.2	5.1	110	T-40	-	50		
SSH10.0X50	75150	71708	10	50	15	6	10.2	6.2	42	T-40	-	50	
SSH10.0X60	75151	71709		60	15	6	10.2	6.2	42	T-40	-	50	
SSH10.0X80	75152	71710		80	15	6	10.2	6.2	42	T-40	-	50	
SSH10.0X90	75153	71711		90	15	6	10.2	6.2	42	T-40	-	50	
SSH10.0X100	75154	71712		100	15	6	10.2	6.2	55	T-40	-	50	
SSH10.0X120	75155	71713		120	15	6	10.2	6.2	85	T-40	-	50	
SSH10.0X140	75156	71714		140	15	6	10.2	6.2	85	T-40	-	50	
SSH10.0X160	75157	71715		160	15	6	10.2	6.2	110	T-40	-	50	
SSH10.0X180	75158	71716		180	15	6	10.2	6.2	110	T-40	-	50	
SSH10.0X200	75159	73215		200	15	6	10.2	6.2	110	T-40	-	50	
SSH10.0X240	75160	73216		240	15	6	10.2	6.2	125	T-40	-	50	
SSH10.0X280	75161	73217		280	15	6	10.2	6.2	125	T-40	-	50	
SSH12.0X60	75162	71721		12	60	17	6.25	12.2	6.7	48	T-40	-	25
SSH12.0X80	75163	71722			80	17	6.25	12.2	6.7	48	T-40	-	25
SSH12.0X90	75164	71723	90		17	6.25	12.2	6.7	48	T-40	-	25	
SSH12.0X100	75165	71724	100		17	6.25	12.2	6.7	55	T-40	-	25	
SSH12.0X120	75166	76761	120		17	6.25	12.2	6.7	85	T-40	-	25	
SSH12.0X140	75167	71726	140		17	6.25	12.2	6.7	85	T-40	-	25	
SSH12.0X160	75168	71727	160		17	6.25	12.2	6.7	110	T-40	-	25	
SSH12.0X180	75169	71728	180		17	6.25	12.2	6.7	110	T-40	-	25	
SSH12.0X200	75170	71729	200	17	6.25	12.2	6.7	110	T-40	-	25		

SSH  
Hexagon Head Connector Screw Impreg®+

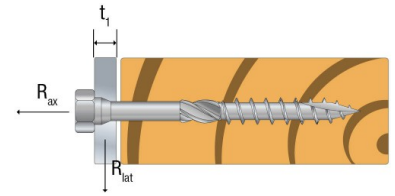

Characteristic properties

Table "Characteristic properties" cannot be displayed : no references available.

SSH  
**Hexagon Head Connector Screw Impreg®+**

## Installation

SSH  
**Hexagon Head Connector Screw Impreg®+**

