

## TML Nylon plug for aerated concrete

TML concrete anchors  $\varnothing 10$  -  $\varnothing 14$  mm are specially designed for fastening in aerated concrete. The anchor is placed after pre-drilling, whereby the external thread cuts positively into the building material and ensures a secure hold. The add-on parts can then be mounted using wood screws or metric screws.



## Applications

### Material


**Nylon dowel (polyamide PA6)**

### Benefits

- High quality nylon plug
- Suitable for wood screws and metric screws

### Applications


- Pictures, Lamps
- Cable and pipe clamps
- Wall cupboards, shelves
- Signs
- Letterboxes



TML  
Nylon plug for aerated concrete

## Technical Data

### Dimensions

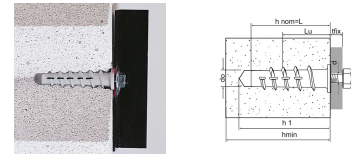

Art. nr.	Product Reference	Hole Diameter x Length [d <sub>0</sub> xL] [mm]	Minimum hole depth [h <sub>1</sub> ] [mm]	Nominal embedment depth [h <sub>nom</sub> ] [mm]	Minimum support thickness [h <sub>min</sub> ] [mm]	Screw diameter min. [mm]	Screw diameter max. [mm]	Metric screw diameter	Anchor length [L <sub>u</sub> ] [mm]	Qty per box	Qty per outer box
6260100605000	TML	10x50	60	50	75	5.5	6	M6	40	25	250
6260100806000		12x60	70	60	85	7	8	M8	50	25	250
6260101007000		14x70	80	70	100	9	10	M10	60	25	250





Screw Length:  $L_v = L_u + t_{fix}$

TML  
Nylon plug for aerated concrete

## Installation

Suitable for

**Aerated concrete**



TML  
Nylon plug for aerated concrete

