

RSNCG

**Ramme-søm 15° trådrulle - Rund hoved, ring skaft - HDG**

*The framing nail is designed for wood to wood constructions and can be used in outdoor environments. The coil collation gives more nails in the magazine and reduce the need of reloading. The ring shank increases the withdrawal capacity.*

## Egenskaber

### Material

\*

### Advantages

- Rundt hoved
- Høj udtrækningskapacitet
- Ringformet gevind
- Trådrulle 15°



### Anvendelse

### Support

- Framing wood to wood

### Intend Use

\*

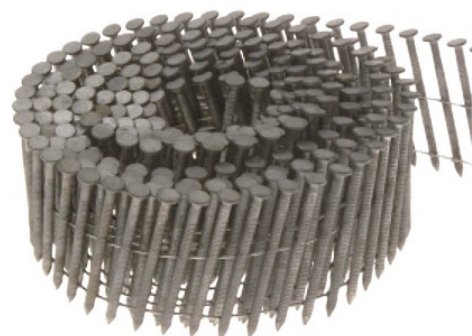


RSNCG

Ramme-søm 15° trådrulle - Rund hoved, ring skaft - HDG


## Teknisk data

### Product dimensions



Art. nr.	Item code	DB nr.	NOBB nr.	Fastener dimensions [mm]									Qty/box	Vægt [kg]
				d	l	d <sub>h</sub>	A <sub>h</sub>	h <sub>t</sub>	l <sub>g</sub>	l <sub>p</sub>	t <sub>fix</sub>			
RSNC15G2.5X45	75661	2056015	55837532	2.5	43.5	5.7	25.5	0.5	32	3.5	25	2000	0.002	
RSNC15G2.5X55	75662	2056016	55837513		53.5	5.7	25.5	0.5	45	3.5	35	2000	0.003	
RSNC15G2.5X65	75658	2056012	55837505		63.5	5.7	25.5	0.5	50	3.5	45	2000	0.003	
RSNC15G2.8X75	75659	2056013	55837524	2.8	73.5	6.9	37.4	0.6	53	2.5	52.6	1500	0.005	
RSNC15G3.1X90	75660	2056014	55837494	3.1	88	6.9	37.4	0.8	70	4.3	65.2	1600	0.006	

### Product characteristic properties



Art. nr.	Product characteristic properties			
	Characteristic Yield Moment – M <sub>y,k</sub> [M <sub>y,k</sub> ] [Nm]	Characteristic withdrawal parameter - f <sub>ax,k,90°</sub> [f <sub>ax,k,90°</sub> ] [N/mm <sup>2</sup> ]	Characteristic head pull-through parameter - f <sub>head,k</sub> [f <sub>head,k</sub> ] [N/mm <sup>2</sup> ]	Characteristic tensile capacity - f <sub>tens,k</sub> [f <sub>tens,k</sub> ] [kN]
RSNC15G2.5X45	2	5.1	22	3
RSNC15G2.5X55	2	5.1	22	3
RSNC15G2.5X65	2	5.1	22	3
RSNC15G2.8X75	3.2	8.9	29.4	3.4
RSNC15G3.1X90	4.6	8.3	18.1	3.8

