

CLNC0A4

Beklædningsøm 0° plastspole - Rundt hoved, ringformet skaft - rustfri A4

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.

Egenskaber

Material

*

Advantages

- Rundt hoved
- 60 graders diamantspids
- Ringformet skaft
- Plastspiral 0°
- Rustfrit A4


Anvendelse

Support

- Cladding/facade wood to wood

Intend Use

*

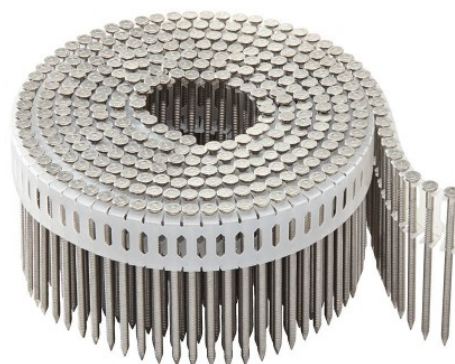


CLNCOA4

Beklædningsøm 0° plastspole - Rundt hoved, ringformet skaft - rustfri A4

Teknisk data

Product dimensions



Art. nr.	Item code	DB nr.	NOBB nr.	Fastener dimensions [mm]										Qty/box	Vægt [kg]
				d	l	d _h	d ₁	A _h	h _t	l _g	l _p	t _{fix}	bit		
CLNCOA42.8X48	75757	2056104	55837645	2.8	48	5.6	-	24.6	0.9	≥ 32	2.5	25.6	-	1950	0.003
CLNCOA42.8X65	75758	2056105	55839518		65	5.6	-	24.6	0.9	≥ 43	2.5	42.6	-	1300	0.005

Product characteristic properties

Art. nr.	Product characteristic properties					
	Characteristic Yield Moment – M _{y,k} [M _{y,k}] [Nm]	Characteristic withdrawal parameter - f _{ax,k,90°} [f _{ax,k,90°}] [N/mm ²]	Characteristic head pull-through parameter - f _{head,k} [f _{head,k}] [N/mm ²]	Characteristic tensile capacity - f _{tens,k} [f _{tens,k}] [kN]	Characteristic torsional strength - f _{tor,k} [f _{tor,k}] [Nm]	Torsional ratio
CLNCOA42.8X48	3.2	8.9	29.4	3.4	-	-
CLNCOA42.8X65	3.2	8.9	29.4	3.4	-	-

Simpson Strong-Tie A/S
Egeskovvej 33 8700 Horsens
tel: +45 8781 7400
info@strongtie.dk

CLNCOA4

Beklædningsøm 0° plastspole - Rundt hoved, ringformet skaft - rustfri A4



www.strongtie.dk