

CLNC0G

Beklædningsøm 0° plastspole - Rundt hoved, ringformet skaft - HDG

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.

Egenskaber

Material

*

Advantages

- Rundt hoved
- 60 graders diamantspids
- Ringformet skaft
- Plastspiral 0°



Anvendelse

Support

- Cladding/facade wood to wood

Intend Use

*

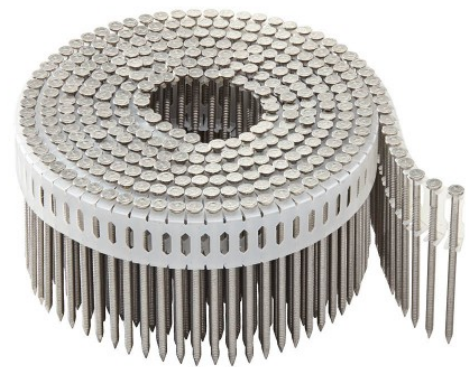


CLNCOG

Beklædningsøm 0° plastspole - Rundt hoved, ringformet skaft - HDG

Teknisk data

Product dimensions



Art. nr.	Item code	DB nr.	NOBB nr.	Fastener dimensions [mm]										Qty/box	Vægt [kg]
				d	l	d _h	d ₁	A _h	h _t	l _g	l _p	t _{rx}	bit		
CLNCOG2.8X48	75759	2056106	55837664	2.8	48	5.6	-	24.6	0.9	≥ 32	2.5	25.6	-	1950	0.002
CLNCOG2.8X65	75760	2056107	55837653		65	5.6	-	24.6	0.9	≥ 43	2.5	42.6	-	1300	0.004

Product characteristic properties

Art. nr.	Product characteristic properties					
	Characteristic Yield Moment – M _{y,k} [M _{y,k}] [Nm]	Characteristic withdrawal parameter - f _{ax,k,90°} [f _{ax,k,90°}] [N/mm ²]	Characteristic head pull-through parameter - f _{head,k} [f _{head,k}] [N/mm ²]	Characteristic tensile capacity - f _{tens,k} [f _{tens,k}] [kN]	Characteristic torsional strength - f _{tor,k} [f _{tor,k}] [Nm]	Torsional ratio
CLNCOG2.8X48	3.2	8.9	29.4	3.4	-	-
CLNCOG2.8X65	3.2	8.9	29.4	3.4	-	-

Simpson Strong-Tie
A/S
Egeskovvej 33 8700
Horsens
tel: +45 8781 7400
info@strongtie.dk

CLNCOG
Beklædningsøm 0° plastspole - Rundt hoved, ringformet skaft - HDG



www.strongtie.dk



Copyright by Simpson Strong-Tie®
Oplysningerne i dette dokument ejes eksklusivt af Simpson Strong-Tie® A/S.
De er kun gældende i forbindelse med produkter, som forhandles af Simpson Strong-Tie® A/S.

2026-04-04