

TPP

Anclaje de impacto con cuello redondeado

El anclaje de impacto con cuello redondeado TPP sirve para fijar con rapidez elementos ligeros a diversos soportes.
El anclaje de nailon limita la transferencia térmica y la punta premontada en el anclaje permite su expansión durante el impacto.

Características

Materia

- Anclaje: nylon gris
- tornillo: acero electrocincado

Ventajas

- Montaje y desmontaje muy sencillo gracias a la rosca del clavo.
- Expansión por atornillado o impacto,
- Apoyo perfecto contra el material, a ras de la superficie
- Ranura en zigzag para evitar que el clavo se desalinee

Aplicaciones

Aplicación

- Fijación de cabrios o ratreles,
- Fijación de escuadras simples y de elementos de carpintería,
- Fijación de carriles y abrazaderas para cables y tubos,
- Fijación de revestimientos delgados en fachadas exteriores e interiores.

Soportes


- Hormigón no fisurado,
- Mampostería hueca y maciza
- Hormigón celular



TPP
Anclaje de impacto con cuello redondeado

Datos técnicos

Dimensiones

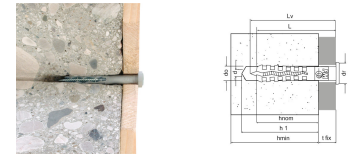

Modelo	Product Reference	Ø agujero x longitud del anclaje [d0xL]. [mm]	Espesor máximo del elemento a fijar [tfix]. [mm]	Profundidad mínima de perforación [h1] [mm]	Profundidad de anclaje nominal [hnom]. [mm]	Esp. mín. de soporte [hmin]. [mm]	Ø tornillos [d] [mm]	Longitud del tornillo [Lv] [mm]	Ø cuello [dr] [mm]	Ctd por caja	Ctd por embalaje
62700B0503000	TPP	Ø5x30*	5	35	25	50	3.4	35	9	300	3000
62700B0504000		Ø5x40*	15	35	25	50	3.4	45	9	200	2000
62700B0505000		Ø5x50*	25	35	25	50	3.4	55	9	200	2000
62700B0604000		Ø6x40	10	40	30	100	3.8	45	10	200	2000
62700B0605000		Ø6x50	20	40	30	100	3.8	55	10	100	1000
62700B0606000		Ø6x60	30	40	30	100	3.8	65	10	100	1000
62700B0806000		Ø8x60	20	50	40	100	4.8	65	11.5	150	1500
62700B0808000		Ø8x80	40	50	40	100	4.8	85	11.5	150	1500
62700B0810000		Ø8x100	60	50	40	100	4.8	105	11.5	100	1000
62700B0812000		Ø8x120	80	50	40	100	4.8	125	11.5	100	1000

* no cubierto por el marcado CE

Design capacities - single anchor - no edge distances

Modelo	Design capacity - Non-cracked concrete (3)				
	Tension - NRd (1)		Shear - VRd (1-2)		Bending moment MRd [Nm]
	C20/25 [kN]	Solid brick [kN]	C20/25 [kN]	Solid brick [kN]	
62700B0503000	0.23	0.2	0.6	0.6	-
62700B0504000	0.23	0.2	0.6	0.6	-
62700B0505000	0.23	0.2	0.6	0.6	-
62700B0604000	0.6	0.36	0.6	0.6	-
62700B0605000	0.6	0.36	0.6	0.6	-
62700B0606000	0.6	0.36	0.6	0.6	-
62700B0806000	0.6	0.45	1.2	1.2	-
62700B0808000	0.6	0.45	1.2	1.2	-
62700B0810000	0.6	0.45	1.2	1.2	-
62700B0812000	0.6	0.45	1.2	1.2	-

- The design loads have been calculated using the partial safety factors for resistances stated in ETA-approval(s). The loading figures are valid for unreinforced concrete and reinforced concrete with a rebar spacing $s \geq 15$ cm (any diameter) or with a rebar spacing $s \geq 10$ cm, if the rebar diameter is 10mm or smaller.
- The figures for shear are based on a single anchor without influence of concrete edges. For anchorages close to edges ($c \leq \max [10 \text{ hef}; 60d]$) the concrete edge failure shall be checked per ETAG 001, Annex C, design method A.
- Concrete is considered non-cracked when the tensile stress within the concrete is $\sigma_L + \sigma_R \leq 0$. In the absence of detailed verification $\sigma_R = 3 \text{ N/mm}^2$ can be assumed (σ_L equals the tensile stress within the concrete induced by external loads, anchors loads included).





*Not covered by ETA-11/0080

TPP

Anclaje de impacto con cuello redondeado

TPP Anclaje de impacto con cuello redondeado

Instalación



Spacing and edge distance

Modelo	Product Reference	Ø agujero x longitud del anclaje [d0xL]. [mm]	Characteristic edge distance [ccr,N] [mm]	Characteristic spacing(5) - Scr,N [scr,N] [mm]
62700B0503000	TPP	Ø5x30*	50	50
62700B0504000	TPP	Ø5x40*	50	50
62700B0505000	TPP	Ø5x50*	50	50
62700B0604000	TPP	Ø6x40	100	100
62700B0605000	TPP	Ø6x50	100	100
62700B0606000	TPP	Ø6x60	100	100
62700B0806000	TPP	Ø8x60	100	100
62700B0808000	TPP	Ø8x80	100	100
62700B0810000	TPP	Ø8x100	100	100
62700B0812000	TPP	Ø8x120	100	100

* Not included in the approval

Installation data

Modelo	Product Reference	Ø agujero x longitud del anclaje [d0xL]. [mm]	Ø drilling hole [d0] [mm]	Min. drill depth [h1] [mm]	Min. support thickness [hmin] [mm]
62700B0503000	TPP	Ø5x30*	5	35	50
62700B0504000	TPP	Ø5x40*	5	35	50
62700B0505000	TPP	Ø5x50*	5	35	50
62700B0604000	TPP	Ø6x40	6	40	100
62700B0605000	TPP	Ø6x50	6	40	100
62700B0606000	TPP	Ø6x60	6	40	100
62700B0806000	TPP	Ø8x60	8	50	100
62700B0808000	TPP	Ø8x80	8	50	100
62700B0810000	TPP	Ø8x100	8	50	100
62700B0812000	TPP	Ø8x120	8	50	100

TPP

Anclaje de impacto con cuello redondeado

TPP

**Anclaje de impacto con cuello
redondeado**

