

Tekniset tiedot

FSB EG

Wafer Head Steel Screw - Drill Point

SIMPSON

Strong-Tie

Used to fix external board materials such as plasterboard and fibre cement board to steel joists up to 2.0 mm in thickness.

Ominaisuudet


Features

- Cross point drive
- Wafer head
- Drill point
- Metal tapping thread
- Electrogalvanised coating
- Protec coating option

Sovellus

Suitable for

- Steel to steel.
- Fibre cement board to steel.
- Wood Fibre board to steel.





FSB EG

Wafer Head Steel Screw - Drill Point

Technical Data

Mitat

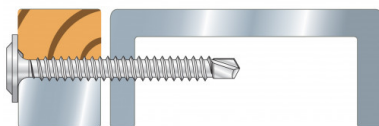

Tuotenro	Tuotenumero	Mitat [mm]				Paino [kg]
		d	l	d _h	Bit	
FSB4.2X13 EG	74410	4.2	13	12	PH2	0.002
FSB4.2X25 EG	74411	4.2	25	12	PH2	0.002
FSB4.2X32 EG	75501	4.2	32	12	PH2	0.003
FSB4.2X40 EG	74406	4.2	40	12	PH2	0.003
FSB4.2X65 EG	74407	4.2	65	12	PH2	0.005

