

TT Wood Fibre to Steel Screw

The TT wood fibre board screws are used indoors for fastening OSB, chipboard and Plywood to substrates made of steel with a maximum thickness of 1.0 mm. The sharp point efficiently penetrates the substrate, and the twin thread enables a quick mounting.

Ominaisuudet


Features

- PH drive
- Countersunk head with ribs
- Sharp point
- Twin thread
- Phosphated coating

Sovellus

Suitable for

- Wood fibre board to steel

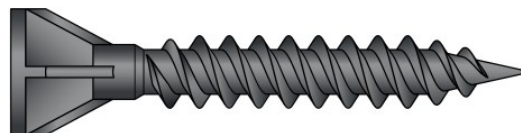

TT
Wood Fibre to Steel Screw

Technical Data

Mitat ja ominaisarvot



Tuotenro	Tuotenumero	Mitat [mm]					Paino [kg]
		d	l	d _h	l _g	Bit	
TT3.9X28	74391	3.9	28	7	21.5	PH2	0.002

TT Collated Screws

Tuotenro	Tuotenumero	DB nr.	NOBB nr.	Mitat [mm]						Qty/box
				d	l	d _h	d ₁	l _g	Bit	
TT3.9X28 Collated	74390	1949885	53293240	3.9	28	7	2.4	21.5	PH2	1000

