Tekniset tiedot

CLNC0G

Cladding Nail 0° Plastic Coil - Round Head, Ring shank - HDG

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.

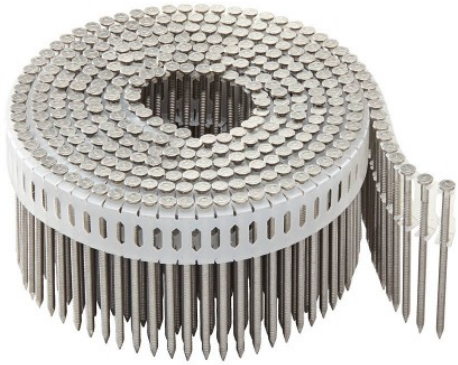





Ominaisuudet

Advantages

- Round head
- 60 degree diamond point
- Ring shank
- Plastic coil 0°

Sovellus

Support

- Cladding/facade wood to wood

CLNC0G
Cladding Nail 0° Plastic Coil - Round Head, Ring shank - HDG

Technical Data

Product dimensions



Tuotenro	Item code	NOBB nr.	Fastener dimensions [mm]					
			d	l	d_h	l_g	t_{fix}	bit
CLNC0G2.8X48	75759	55837664	2.8	48	5.6	≥ 32	25.6	-
CLNC0G2.8X65	75760	55837653		65	5.6	≥ 43	42.6	-

Product characteristic properties

Tuotenro	Product characteristic properties					
	Characteristic Yield Moment – $M_{y,k}$ [$M_{y,k}$] [Nm]	Characteristic withdrawal parameter - $f_{ax,k,90°}$ [$f_{ax.k.90°}$] [N/mm²]	Characteristic head pull-through parameter - $f_{head,k}$ [$f_{head.k}$] [N/mm²]	Characteristic tensile capacity - $f_{tens,k}$ [$f_{tens.k}$] [kN]	Characteristic torsional strength - $f_{tor,k}$ [$f_{tor.k}$] [Nm]	Torsonial ratio
CLNC0G2.8X48	3.2	8.9	29.4	3.4	-	-
CLNC0G2.8X65	3.2	8.9	29.4	3.4	-	-

Simpson Strong-Tie / Gbo Fastening Systems AB
Bruksvägen 2, 593 75 Gunnebo
tel: 0490-300 00
fax : 0490-233 00

Copyright by Simpson Strong-Tie®
Tämän materiaalin tiedot ovat yksinomaan Simpson Strong-Tie:n © omaisuutta
Tiedot ovat voimassa ja käytettävissä ainoastaan Simpson –Strong-Tie:n © tuotteita käytettäessä.