

Tekniset tiedot

CLNC0G

Cladding Nail 0° Plastic Coil - Round Head, Ring shank - HDG

SIMPSON

Strong-Tie

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.

Ominaisuuudet


Advantages

- Round head
- 60 degree diamond point
- Ring shank
- Plastic coil 0°

Sovellus

Support

- Cladding/facade wood to wood

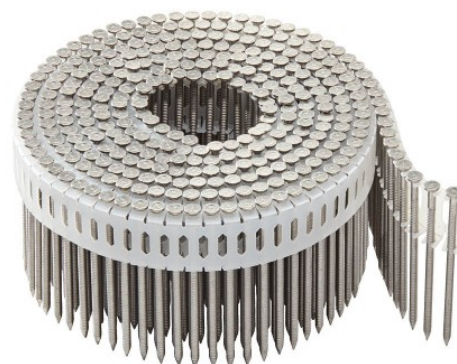

CLNCOG

Cladding Nail 0° Plastic Coil - Round Head, Ring shank - HDG

Technical Data

Product dimensions



Tuotenro	Item code	NOBB nr.	Fastener dimensions [mm]						Paino [kg]
			d	l	d _h	l _g	t _{fix}	bit	
CLNCOG2.8X48	75759	55837664	2.8	48	5.6	≥ 32	25.6	-	0.002
CLNCOG2.8X65	75760	55837653		65	5.6	≥ 43	42.6	-	0.004

Product characteristic properties

Tuotenro	Product characteristic properties					
	Characteristic Yield Moment – M _{y,k} [M _{y,k}] [Nm]	Characteristic withdrawal parameter - f _{ax,k,90°} [f _{ax,k,90°}] [N/mm ²]	Characteristic head pull-through parameter - f _{head,k} [f _{head,k}] [N/mm ²]	Characteristic tensile capacity - f _{tens,k} [f _{tens,k}] [kN]	Characteristic torsional strength - f _{tor,k} [f _{tor,k}] [Nm]	Torsional ratio
CLNCOG2.8X48	3.2	8.9	29.4	3.4	-	-
CLNCOG2.8X65	3.2	8.9	29.4	3.4	-	-

