

Tekniset tiedot

FSB Protec Wafer Head Steel Screw - Drill Point - Protec+

SIMPSON**Strong-Tie**

Used to fix external board materials such as plasterboard and fibre cement board to steel joists up to 2.0 mm in thickness.

Ominaisuudet

Features

- Cross point drive
- Wafer head
- Drill point
- Metal tapping thread
- Protec+ coating

Sovellus

Suitable for

- Steel to steel
- Fibre cement board to steel
- Wood fibre board to steel
- Drywall to steel





FSB Protec

Wafer Head Steel Screw - Drill Point - Protec+

Technical Data

Mitat

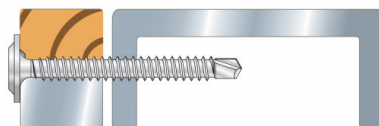

Tuotenro	Item code	Mitat [mm]				Paino [kg]
		d	l	d _h	bit	
FSB4.2X13 PROTEC	74412	4.2	13	11.5	PH2	0.002
FSB4.2X25 PROTEC	74409		25	11.5	PH2	0.002
FSB4.2X32 PROTEC	74408		32	11.5	PH2	0.003

