

Tekniset tiedot

EFIXR Adjustable Angle Brackets

SIMPSON

Strong-Tie

EFIXR angle brackets are intended for all assemblies for the design and installation of interior and exterior joinery. EFIXR stiffener improves rigidity particularly for large models.

Ominaisuudet

Materiaali

- Galvanized steel S250GD + Z275 according to NF EN 10346.

Hyödyt

- The 2 obround holes make adjustments easier.


Sovellus

Liitos

- Supporting member type:** wood, concrete, metal, PVC.
- Supported member type:** wood, concrete, metal, PVC.

Käyttökohteet


- Frames.
- Storage cabinets.

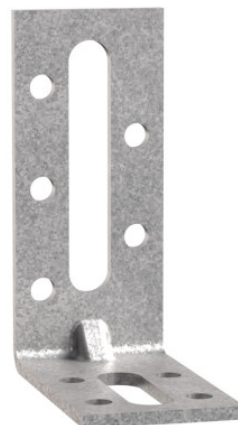

EFIXR

Adjustable Angle Brackets

Technical Data

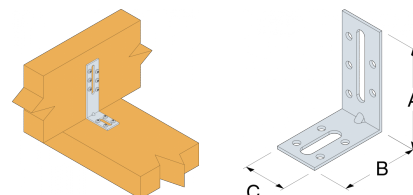

Mitat

Tuotenro	Mitat ja ominaisarvot [mm]					Reiät, sivu A						Reiät, sivu B			Paino [kg]
	A	B	C	t	Ø5	Ø6.5x30	Ø6.5x45	Ø6.5x50	Ø6.5x55	Ø6.5x65	Obround	Ø5	Ø8,5x30	Obround	
EFIXR553	50	54	30	2	4	1	-	-	-	-	-	4	1	-	0.04
EFIXR753	70	54	30	2	5	-	-	1	-	-	-	4	1	-	0.05
EFIXR853A	80	55	30	2.5	6	-	-	-	1	-	-	4	1	-	0.06
EFIXR853B	80	50	30	3	8	-	1	-	-	-	-	4	1	-	0.07
EFIXR1053	100	54	30	2.5	6	-	-	-	-	1	-	4	1	-	0.07
EFIXR1253	120	54	30	3	6	-	-	-	-	1	-	4	1	-	0.1
EFIXR1453	140	54	30	3	6	-	-	-	-	1	-	4	1	-	0.12
EFIXR1653	160	54	30	3	6	-	-	-	-	1	-	4	1	-	0.13
EFIXR553C50	50	54	30	2	4	1	-	-	-	-	1 x Ø6.5x30	4	1	1 x Ø8.5x30	0.02
EFIXR753C50	70	54	30	2	5	-	-	1	-	-	1 x Ø6.5x50	4	1	1 x Ø8.5x30	0.045
EFIXR1053C50	100	54	30	2.5	6	-	-	-	-	1	1 x Ø6.5x65	4	1	1 x Ø8.5x30	0.07
EFIXR1253C50	120	54	30	3	6	-	-	-	-	1	1 x Ø6.5x65	4	1	1 x Ø8.5x30	0.1

EFIXR

Adjustable Angle Brackets

Asennus

Kiinnittäminen

Nail holes dia. 5 mm and obround holes width 8.5 and 6.5 mm.**On wood:**

- CNA annular ring-shank nails 4.0 mm.
- Bolts.
- LAG screws.
- CSA screws dia. 5.0 mm.

On concrete:

- TPP 8-60/20 anchors.

On metal:

- Bolts.
- Self-drilling screws.

Kiinnittäminen

1. Set in position the fixture on the base material
2. Place the bracket on the fixture and secure it with appropriate nail or screw set in the oblong hole.
3. On timber base material, use appropriate nail or screw in the oblong hole, then when the position of the fixture is adjusted, set nail(s) or screw(s) in the round holes.
4. On concrete base material, use appropriate anchor in the oblong hole, then when the position of the fixture is adjusted, set nail(s) or screw(s) in the round holes on the fixture.

