
Technical data sheet

PPSD

Timber to Steel Screw



The PPSD is suitable for timber to steel applications. It has a countersunk ribbed flat head which ebables the head of the screw to be easily countersunk in the timber ensuring a neat finish. The screw has a fine thread and pilot drill point which eliminates the need for a pilot hole.

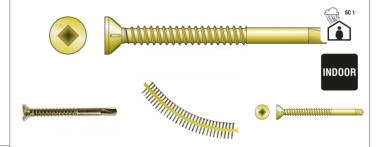

Features

Material

• Steel - Yellow zinc coated

Benefits

- Countersunk ribbed flat head for a neat finish
- Pilot point
- Fine thread
- Driver bits included (BIT3SE)

Applications

Support

• Suitable for 1mm - 2mm steel

Common Applications

• Fixing timber to steel



Technical data sheet

PPSD

Timber to Steel Screw



Technical Data

Product Dimensions UK

	References	Fastener dimensions [mm]			Qty per Strip	Qty per Box	Recommended RPM	Quik Drive Attachment
		d _h	d	I	Grand Surb	GLY POI DUX	necommenueu new	QUIN DITVE ALLACITITETIL
P	PSD49E	8	4.1	49	30	2000	2500	QDPR051E / QD76KE





