

Technical data sheet

SIMPSON

Strong-Tie

PPSD

Timber to Steel Screw

The PPSD is suitable for timber to steel applications. It has a countersunk ribbed flat head which enables the head of the screw to be easily countersunk in the timber ensuring a neat finish. The screw has a fine thread and pilot drill point which eliminates the need for a pilot hole.

Features

Material

- Steel - Yellow zinc coated

Benefits

- Countersunk ribbed flat head for a neat finish
- Pilot point
- Fine thread
- Driver bits included (BIT3SE)


Applications

Support

- Suitable for 1mm - 2mm steel

Common Applications

- Fixing timber to steel

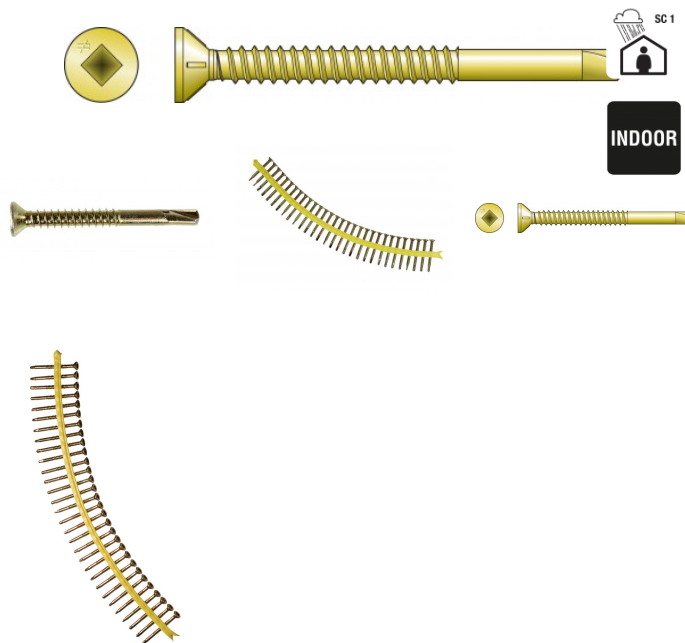

PPSD

Timber to Steel Screw

Technical Data

Product Dimensions UK

References	Fastener dimensions [mm]			Qty per Strip	Qty per Box	Recommended RPM	Quik Drive Attachment
	d _h	d	l				
PPSD49E	8	4.1	49	30	2000	2500	QDPR051E / QD76KE

Winchester Road Cardinal Point Tamworth Staffordshire B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616

PPSD
Timber to Steel Screw



www.strongtie.co.uk