

Technical data sheet

SIMPSON

Strong-Tie

XLSH Bracket Screw

The XLSH screws are self-drilling screws with a hex washer head and shoulder. The screw is used for connecting over-sail movement and LGSSC brackets to light gauge steel sections. The shoulder screw is positioned through the slots in the movement bracket and fixed to the light gauge steel sections. For the LGSSC bracket the screw is positioned through the lower slots of the LGSSC bracket and fixed to the lower stud of the light gauge steel sections. Driver bit not included.

Features

Material

Steel - yellow zinc coating


Features

- Hex head shoulder screw
- Self-drilling point
- Suitable for 450 grade hardened steel

Applications

Common Applications

Fixing LGSSC brackets to light gauge steel
Fixing movement clips to light gauge steel

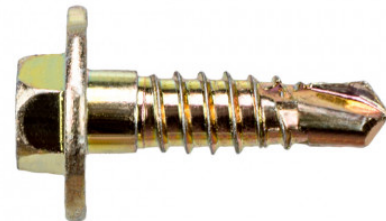


YZP

INDOOR

XLSH
Bracket Screw

Technical Data

Product Dimensions

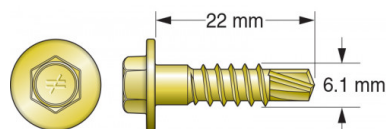

XLSH78B1414 Shouldered Screw - Used for installation on Stud

References	Fastener dimensions [mm]				TPI	Drill point	Box Quantity	Weight [kg]
	Head	d _w	d	l				
XLSH34B1414-83	5/16" Hex	15.6	6.2	19	14	#3	83	-
XLSH78B1414	5/16" Hex	15.6	6.2	22	14	#3	N/A	0.34

XLSH78B1414 screws supplied with specific brackets only. Not available for individual purchase.

