Technical data sheet

X34 Self-Drilling Screw

The X34 is a 4.8mm diameter self-drilling screw with a #3 drill point and hex washer head. The drill point allows the screw to penetrate the steel without the need for a pilot hole. Driver bit not included.

Features

Material

Steel - Clear zinc coating


Features

- 4.8mm x 19mm
- 5/16" hex washer head
- #3 drill point

Applications

Common Applications

Recommnded for use with Simpson Strong-Tie tension ties when fixing to light gauge steel

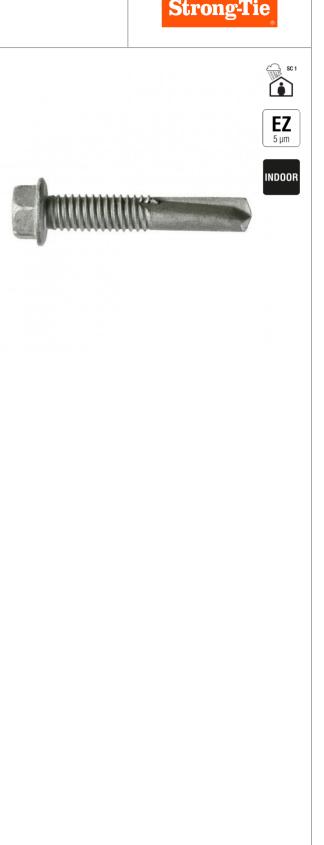

SIMPSON Strong-Tie

X34 Self-Drilling Screw

Technical Data

Product Dimensions

References	Fastener dimensions [mm]				трі	Drill Point	Box Quantity	
	Head	d _w	d	I	151		DOX Quanuty	
X34B1016R100	5/16" Head	10.5	4.8	19	16	#3	100	

Performance Values

References	Performance Values [kN] / Member Thickness [mm]											
	Shear				Tension							
	Safe Workin	g Loads [kN]	Characteristi	c Loads [kN]	Safe Workin	g Loads [kN]	Characteristic Loads [kN]					
	1.2 [mm]	1.6 [mm]	1.2 [mm]	1.6 [mm]	1.2 [mm]	1.6 [mm]	1.2 [mm]	1.6 [mm]				
X34B1016R100	1.6	2.4	2.5	3.6	0.6	0.9	0.9	1.4				

Winchester Road Cardinal Point Tamworth Staffordshire B78 3HG tel: +44 1827 255600 fax: +44 1827 255616

Copyright by Simpson Strong-Tie® Information presented on this document is the exclusive property of Simpson Strong-Tie® It is valid only when associated with products supplied by Simpson Strong-Tie®

2024-04-26

X34

Self-Drilling Screw



SIMPSON Strong-Tie

www.strongtie.co.uk