

Technical data sheet



ABR Reinforced angle brackets

Reinforced angle brackets are suitable for structural applications in framing and wood-frame houses.

Features

Material

- Galvanized steel S250GD + Z275 according to NF EN 10346.

Benefits

- High rigidity through double-sided splash back
- High load values

Applications

Suitable On

- Supporting member:** solid wood, glued-laminated wood, concrete, steel, etc.
- Supported member:** solid wood, composite lumber, glued-laminated wood, triangular trusses, profiles, etc.

When to Use





- Fastening of small trusses.
- Cladding plates, cladding uprights.
- Rafter anchors, cantilevers, headers, etc.



ABR9015




ABR100



ABR
Reinforced angle brackets


Technical Data

Product Dimensions

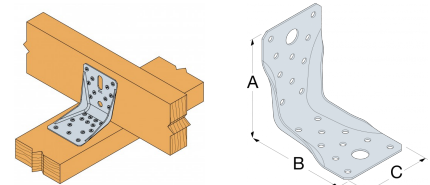

References	Tun / DB nr.	NOB nr.	Product Dimensions [mm]				Joist [mm]				Holes flange B [mm]			Box Quantity	Weight [kg]
			A	B	C	t	Ø5	Ø12	Ø13	Ø12x32	Ø5	Ø12	Ø13		
ABR100	1329235	42424786	103	103	90	2	10	1	-	1	14	1	-	50	0.26

Wood/wood connection beam/beam type - assembly with 2 angle brackets

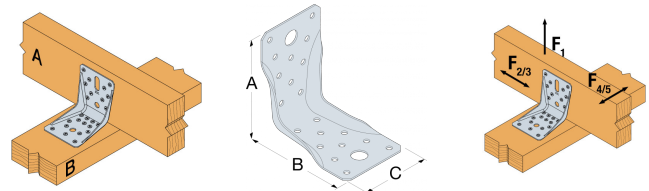


References	Product capacities - Timber to timber - Full nailing											
	Number of Fasteners		Characteristic capacities - Timber C24 - 2 angle brackets per connection									
	Joist	Flange B	$R_{1,k}$					$R_{2,k} = R_{3,k}$				
	Qty	Qty	CNA4.0x35	CNA4.0x40	CNA4.0x50	CNA4.0x60	CSA5.0x40	CNA4.0x35	CNA4.0x40	CNA4.0x50	CNA4.0x60	CSA5.0x40
ABR100	10	14	9.7	11.7	15.7	19.7	min (26,7/kmod ^{0,2} ; 27 /kmod)	9.6	12.8	14.2	16.7	20.3

1) $b = 75 \text{ mm}$; $e = 130 \text{ mm}$

To obtain the resistance values for a single bracket, the values in the above table should be divided by two, pro rotation. Please consult our ETA-06/0106 if the beam is free to rotate.

Wood/wood connection post/beam type - assembly with 2 angle brackets

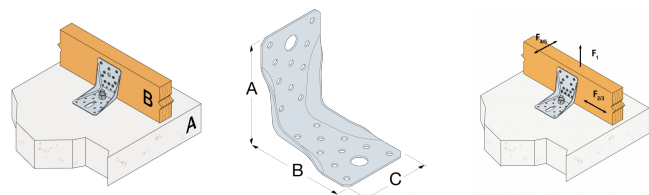


References	Product capacities - Timber beam to Concrete											
	Number of Fasteners		Characteristic capacities - Timber C24 - 2 angle brackets per connection [kN]									
	Joist	Flange B	$R_{1,k}$				$R_{2,k} = R_{3,k}$			$R_{4,k} = R_{5,k}$		
	Qty	Type	Qty	Type	CNA4.0x35	CNA4.0x40	CNA4.0x50	CNA4.0x35	CNA4.0x40	CNA4.0x50	CNA4.0x35	CNA4.0x40
ABR100	1	Ø10	10	CNA*	min (17,1; 21,6 /kmod)	min (20,6; 21,6 /kmod)	min (26,6; 21,6 /kmod)	7.2	8.7	10.9	8.6	10.4

* Refer to Characteristic Capacity table columns for type of fasteners that can be used in Flange A. Capacities vary depending on fastener type used.

To obtain the resistance values for a single bracket, the values in the above table should be divided by two, provided that the supported beam is locked in rotation. Please consult our ETA-06/0106 if the beam is free to rotate.

ABR Reinforced angle brackets


Characteristic capacities - Timber to steel - Connection with 2 brackets

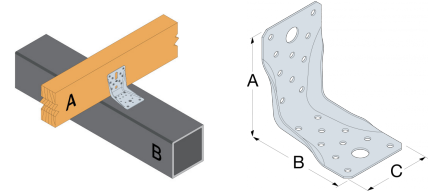

References	Product capacities - Timber to Steel								
	Number of Fasteners				Characteristic capacities - Timber C24 - 2 angle brackets per connection [kN]				
	Joist		Flange B		$R_{1,k}$				
	Qty	Type	Qty	Type	CNA4.0x60				
ABR100	10	CNA*	4	PDPA-75	21.5				

To obtain the resistance values for a single bracket, the values in the above table should be divided by two, provided that the supported beam is locked in rotation. Please consult our ETA-06/0106 if the beam is free to rotate.

Simplified characteristic capacities - Timber to concrete - Connection with 2 brackets

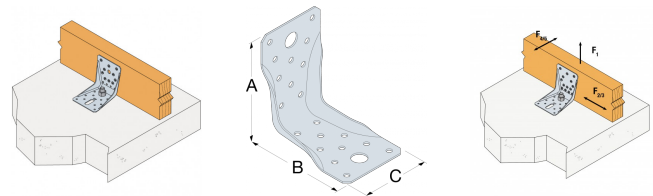

References	Simplified product capacities - Timber to Concrete									
	Number of Fasteners				Simplified characteristic capacities - Timber C24 - 2 angle brackets per connection [kN]					
	Joist		Flange B		$R_{1,k}^{**}$			$R_{2,k} = R_{3,k}$		
	Qty	Type	Qty	Type	CNA4.0x35	CNA4.0x40	CNA4.0x50	CNA4.0x35	CNA4.0x40	CNA4.0x50
ABR100	1	Ø10	10	CNA*	17.1	20.6	24	7.2	8.7	10.9

* Refer to Characteristic Capacity table columns for type of fasteners that can be used in Flange A. Capacities vary depending on fastener type used.

Refer to the Simpson Strong-Tie anchor product range for suitable anchors. Typical anchor solutions depend on the concrete type, spacing and edge distances.

** The published characteristic capacity is based on short term load duration and service class 2 according to EC5 (EN 1995) – $k_{mod} = 0.9$. For other load duration and service class, please refer to the ETA to get more accurate capacities

With combined loads, the following formula shall be fulfilled

$$\sqrt{\left(\frac{F_{1,d}}{R_{1,d}} + \frac{F_{4/5,d}}{R_{4/5,d}}\right)^2 + \left(\frac{F_{2/3,d}}{R_{2/3,d}}\right)^2} \leq 1$$


To obtain the resistance values for a single bracket, the values in the above table should be divided by two, provided that the supported beam is locked in rotation. Please consult our ETA-06/0106 if the beam is free to rotate.

Technical data sheet




ABR
Reinforced angle brackets

Characteristic capacities - Timber beam to timber beam - Ø10 connector screws - 2 angle brackets

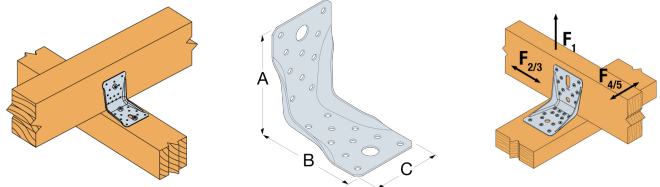

References	Product capacities - Timber beam to timber beam - Ø10 connector screws - 2 angle brackets							
	Fasteners				Characteristic capacities - Timber C24 - 2 angle brackets per connection [kN]			
	Flange A		Flange B		$R_{1,k}$	$R_{2,k} = R_{3,k}$		
	Qty	Type	Qty	Type	SSH10x40	SSH10x40		
ABR100	2	SSH	1	SSH	5.2	2.7		

Characteristic capacities - Timber beam to concrete - Ø10 connector screws - 2 angle brackets

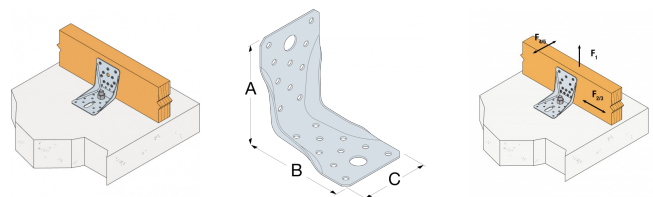

References	Product capacities - Timber beam to rigid support - Ø10 connector screws - 2 angle brackets							
	Fasteners				Characteristic capacities - Timber C24 - 2 angle brackets per connection [kN]			
	Flange A		Flange B		$R_{1,k}$	$R_{2,k} = R_{3,k}$		
	Qty	Type	Qty	Type	SSH10x40	SSH10x40		
ABR100	1	Ø10	1	SSH	5.7	4.1		

Refer to the Simpson Strong-Tie anchor product range for suitable anchors. Typical anchor solutions are FM753, AT-HP, depending on the concrete type, spacing and edge distances.

Installation

Fixing

On wood:

- CNA annular ring-shank nails dia. 4.0 x 35 or dia. 4.0 x 50 mm.
- CSA screws dia. 5.0 x 35 mm or CSA screws dia. 5.0 x 40 mm.
- Bolts.
- LAG screws.

On concrete:

Concrete substrate





- *Mechanical anchor:* WA M10-78/5 OR WA M12-104/5 pin.
- *Chemical anchor:* AT-HP resin + LMAS M10-120/25 or LMAS M12-150/35 threaded rod.

Hollow masonry substrate:

- *Chemical anchor:* AT-HP or POLY-GP resin + LMAS M12-150/35 threaded rod + SH M16-130 screen.

On steel:

- Bolts.



ABR
Reinforced angle brackets

Technical Notes

