

Technical data sheet

SIMPSON

Strong-Tie


A34

Framing Anchor/Universal Framing Anchor

The A34E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections.

Balanced, completely reversible design allows the A34E to be used to secure a wide variety of connections.


CE

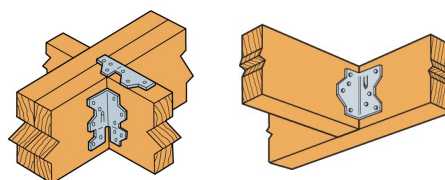

A34

Framing Anchor/Universal Framing Anchor

Technical Data



A34 / A35

References	Dimensions [mm]				Holes	
	A	B	C	t	Flange A	Flange B
					Ø4.1	Ø4.1
A34E	33	33	64	1.2	4	4

A34E Performance Values

References	Number of Fasteners		Installation	Characteristic Capacity - Timber C24 ⁽³⁾ [kN] R _{2,k}	Safe Working Load - Timber C16 [kN]										
	Flange A	Flange B			Long Term						Medium Term				
	N3.75x30	N3.75x30			R _{1,SWL}	R _{2,SWL}	R _{3,SWL}	R _{4,SWL}	R _{5,SWL}	R _{6,SWL}	R _{1,SWL}	R _{2,SWL}	R _{3,SWL}	R _{4,SWL}	R _{5,SWL}
A34E	4	4	1	-	1.3	1.3	-	1.1	-	-	1.5	1.5	-	1.2	-

(3) Based upon 2 No brackets installed diagonally opposite to each other

