

## MVB Movement Bead

*Plastering and rendering made simple.*

- Products simply fixed with plaster dabs or nails.
- Edges, arrises, corners, joints and abutments all easier to form.
- Designed to minimise potential chipping, cracking and associated damage.


*Movement bead (140mm overall width, 65mm wing)*

- Movement Bead consists of two lengths of Stop Bead linked with a white PVC extrusion.
- Allows +/-3mm differential expansion or settlement movement between adjoining surfaces.

### **Installation**

*Edge beads may be fixed by dabs or by masonry nails of similar material.*

*Plasterboard Edge Bead: Fix the perforated wing flush to the board face before applying final skim coat. The bead may be reversed if required by fixing the wing to the board's inner surface.*

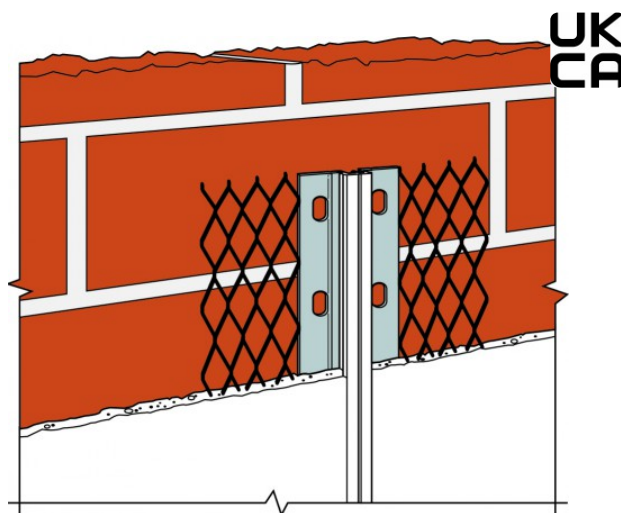

MVB  
**Movement Bead**

# Technical Data

## MVB Product Dimensions

References	Material	Dimensions
MVB1030	Galvanised	10mm x 3.0m
MVB1330	Galvanised	13mm x 3.0m
MVB1630	Galvanised	16mm x 3.0m
MVB1630S	Stainless Steel	16mm x 3.0m
MVB1930	Galvanised	19mm x 3.0m

Winchester Road Cardinal Point Tamworth Staffordshire B78 3HG  
tel: +44 1827 255600  
fax: +44 1827 255616

MVB  
**Movement Bead**



**SIMPSON**

**Strong-Tie**

Copyright by Simpson Strong-Tie®  
Information presented on this document is the exclusive property of Simpson Strong-Tie®  
It is valid only when associated with products supplied by Simpson Strong-Tie®

2024-05-06

[www.strongtie.co.uk](http://www.strongtie.co.uk)