

PSB

## Thin Coat Plaster Stop Bead

*Plastering and rendering made simple.*

- Products simply fixed with plaster dabs or nails.
- Edges, arrises, corners, joints and abutments all easier to form.
- Designed to minimise potential chipping, cracking and associated damage.

*Thin coat plaster stop bead (30mm Perforated Wing)*



- Provides a neat finished thin coat plaster edge wherever required.
- Numerous applications internally including those at openings, abutment of walls and for ceiling finishes.

### Installation

*Edge beads may be fixed by dabs or by masonry nails of similar material.*

*Plasterboard Edge Bead: Fix the perforated wing flush to the board face before applying final skim coat. The bead may be reversed if required by fixing the wing to the board's inner surface.*

**UK  
CA**

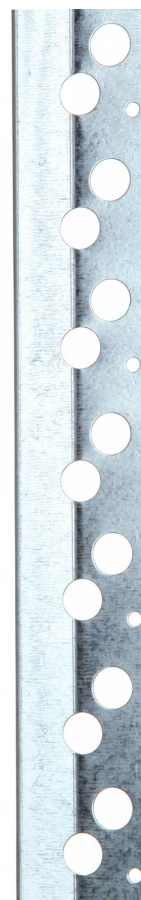

PSB

**Thin Coat Plaster Stop Bead**

## Technical Data

### PSB Dimensions

References	Material	Dimensions
PSB0324	Galvanised	3mm x 2.4m
PSB0330	Galvanised	3mm x 3.0m
PSB0624	Galvanised	6mm x 2.4m
PSB0630	Galvanised	6mm x 3.0m

### PSB (Mesh Wing) Dimensions

References	Material	Dimensions
PSB1024	Galvanised	10mm x 2.4m
PSB1030	Galvanised	10mm x 3.0m
PSB1030S	Stainless Steel	10mm x 3.0m
PSB1324	Galvanised	13mm x 2.4m
PSB1330	Galvanised	13mm x 3.0m
PSB1330S	Stainless Steel	13mm x 3.0m
PSB1624	Galvanised	16mm x 2.4m
PSB1630	Galvanised	16mm x 3.0m
PSB1630S	Stainless Steel	16mm x 3.0m
PSB1930	Galvanised	19mm x 3.0m
PSB1930S	Stainless Steel	19mm x 3.0m

Winchester Road Cardinal Point Tamworth Staffordshire B78  
3HG  
tel: +44 1827 255600  
fax: +44 1827 255616

Copyright by Simpson Strong-Tie®

Information presented on this document is the exclusive property of Simpson Strong-Tie®  
It is valid only when associated with products supplied by Simpson Strong-Tie®

PSB  
**Thin Coat Plaster Stop  
Bead**



[www.strongtie.co.uk](http://www.strongtie.co.uk)

**SIMPSON**

**Strong-Tie**

2024-04-29