

# Technical data sheet



## CBH Concealed Beam Hanger

*The CBH hanger is a development of the TU range.  
It allows for concealed timber to timber connections and can be face fixed or pocketed on to the header timber.*

### Features

#### Material

- Galvanized steel S250GD + Z275 according to NF EN 10346

#### Benefits

- Concealed assembly
- Fastening on wood or concrete
- Optimised installation compliant with Eurocodes


### Applications

#### Suitable On

- Supporting member:** solid wood, composite lumber, glued-laminated wood
- Supported member:** solid wood, composite lumber, glued-laminated wood

#### When to Use

- Joists
- Purlins
- Structural beams

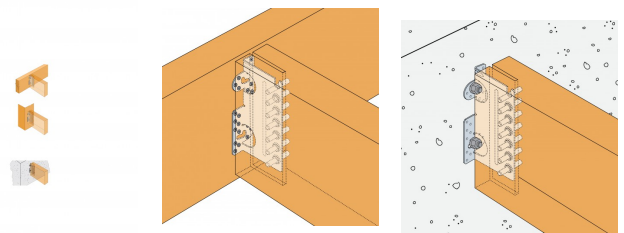

Fixation bois/bois


# Technical data sheet

**SIMPSON**

**Strong-Tie**


CBH  
Concealed Beam Hanger

## Technical Data



### Product Dimensions

References	Header dimensions [mm]	Joist Size [mm]				Product Dimensions [mm]				Header holes		Joist holes
	Height	Width	Height			A	B	C	t	Ø11	Ø5	Ø10.5
	Min	Min	Min $\beta=0$	Min $\beta\neq 0$	Max.							
CBH150/2.5	192	60	190	219	225	150	113.5	60	2.5	2	14	5
CBH180/2.5	222	60	220	249	270	180	113.5	60	2.5	2	16	6
CBH220/2.5	262	60	250	279	330	220	113.5	60	2.5	2	22	7

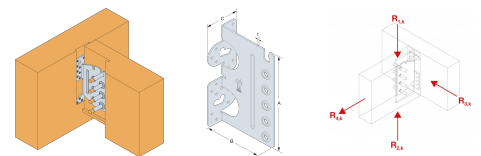

### Wood/wood fastening- Characteristic values in kn

References	Product Capacities										
	Number of Fasteners				Product characteristic capacities - Timber C24 [kN]						
	Header		Joist		$R_{1,k}$ - Slope $\beta=0^\circ$						
	Qty	Type	Qty	Type	Dowels length [mm]						
					60	80	100	120	140	160	
CBH150/2.5	14	CNA4,0x60	5	STD10	18	18.6	20.7	22.4	24	24	
CBH180/2.5	16	CNA4,0x60	6	STD10	25	26.5	29.5	32.1	32.6	32.6	
CBH220/2.5	22	CNA4,0x60	7	STD10	32.6	34.2	37.9	41.1	42.8	42.8	

### Product Characteristic capacities - Slope = $>0^\circ$

References	Number of Fasteners				Product characteristic capacities - Timber C24 [kN]					
	Header		Joist		$R_{1,k}$ Slope $\beta>0^\circ$					
	Qty	Type	Qty	Type	Dowels Length [mm]					
					60	80	100	120	140	160
	CBH150/2.5	14	CNA4,0x60	5	STD10	16.4	16.7	18	19.3	20.6
CBH180/2.5	16	CNA4,0x60	6	STD10	22.5	23.4	25.6	27.6	29.7	30.1
CBH220/2.5	22	CNA4,0x60	7	STD10	29.8	30.8	33.3	35.7	38.3	39.5

## CBH Concealed Beam Hanger

### Installation

#### Fasteners

##### **Wood/Wood:**

##### **Supporting member:**

- CNA annular ring-shank nails dia. 4.0 x 60 mm compliant with ETA-04/0013



##### **Supported member:**

- Dowels dia. 10 mm (length to be specified depending on wood thickness)


#### Installation

##### **Pocket Installation**


- Make a vertical pocket in the middle of the supported member 9 mm thick




Installation du CBH sur les chevilles



Installation des écrous



Rotation du CBH



Position définitive sur béton

CBH  
**Concealed Beam Hanger**

## Technical Notes

Winchester Road Cardinal Point Tamworth Staffordshire B78  
3HG  
tel: +44 1827 255600  
fax: +44 1827 255616

Copyright by Simpson Strong-Tie®

Information presented on this document is the exclusive property of Simpson Strong-Tie®  
It is valid only when associated with products supplied by Simpson Strong-Tie®

CBH  
**Concealed Beam  
Hanger**



[www.strongtie.co.uk](http://www.strongtie.co.uk)