

Technical data sheet

SIMPSON

Strong-Tie

RSND34G

Framing Nail 34° Paper tape - Clipped Head, Ring shank - HDG

The framing nail is used for wood to wood constructions. The clipped head and the tight collation means that more nails can be loaded in the tools and the ring shank increases the withdrawal capacity.

Features

Material

*

Advantages

- Clipped head (D-head)
- High withdrawal capacity
- Hot dip galvanised
- Annular ring thread
- Paper tape 34°

Applications

Support

- Framing wood to wood

Intend Use

*



Technical data sheet

SIMPSON


Strong-Tie

RSND34G

Framing Nail 34° Paper tape - Clipped Head, Ring shank - HDG

Technical Data

Product dimensions

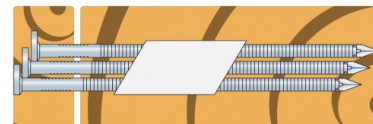

| References | Item code | DB nr. | NOBB nr. | Fastener dimensions [mm] | | | | | | Qty/box | Weight [kg] |
|---------------|-----------|---------|----------|--------------------------|----|----------------|----------------|----------------|------------------|---------|-------------|
| | | | | d | l | d _h | A _h | h _t | t _{fix} | | |
| RSND34G2.8X65 | 75762 | 2056109 | 55837755 | 2.8 | 65 | 5 | 19.6 | 1.1 | 48.2 | 1700 | 0.004 |
| RSND34G2.8X75 | 75763 | 2056110 | 55837766 | | 75 | 5 | 19.6 | 1.1 | 58.2 | 1500 | 0.004 |
| RSND34G3.1X90 | 75764 | 2056111 | 55837740 | 3.1 | 88 | 5.3 | 22.1 | 1.2 | 69.4 | 1000 | 0.006 |

Product characteristic properties

| References | Product characteristic properties | | | |
|---------------|---|---|--|---|
| | Characteristic Yield Moment – M _{y,k} [M _{y,k}] [Nm] | Characteristic withdrawal parameter - f _{ax,k,90°} [f _{ax,k,90°}] [N/mm ²] | Characteristic head pull-through parameter - f _{head,k} [f _{head,k}] [N/mm ²] | Characteristic tensile capacity - f _{tens,k} [f _{tens,k}] [kN] |
| RSND34G2.8X65 | 3.2 | 9.3 | 22.9 | 3.1 |
| RSND34G2.8X75 | 3.2 | 9.3 | 22.9 | 3.1 |
| RSND34G3.1X90 | 4.7 | 8.6 | - | 3.1 |

RSND34G

Framing Nail 34° Paper tape - Clipped Head, Ring shank - HDG



SIMPSON

Strong-Tie