

Technical data sheet

SIMPSON

Strong-Tie

FSB Protec

Wafer Head Steel Screw - Drill Point

Used to fix external board materials such as plasterboard and fibre cement board to steel joists up to 2.0mm in thickness.



Features

Material

-

Features

- Cross point drive.
- Wafer head.
- Drill point.
- Metal tapping thread.
- Electro galvanised coating.
- Protec coating option.

Applications

Suitable For

- Steel to steel.
- Fibre cement board to steel.
- Wood Fibre board to steel.

Use for

-

Technical data sheet

SIMPSON



Strong-Tie

FSB Protec

Wafer Head Steel Screw - Drill Point

Technical Data

Product dimensions

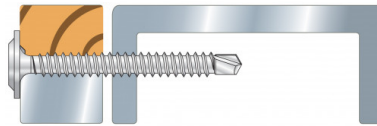

References	Item code	DB nr.	NOBB nr.	Fastener dimensions [mm]					Qty/box	Weight [kg]
				d	l	d _h	d ₁	bit		
FSB4.2X13 PROTEC	74412	1949907	53293145	4.2	13	11.5	2.7	PH2	250	0.002
FSB4.2X25 PROTEC	74409	1949904	53293153		25	11.5	2.7	PH2	250	0.002
FSB4.2X32 PROTEC	74408	1949903	53293164		32	11.5	2.7	PH2	250	0.003

FSB Protec

Wafer Head Steel Screw - Drill Point



SIMPSON

Strong-Tie