

AB55365
AB55365

Suitable for joining wood to wood or wood-concrete joints, for uniform load is recommended to use two brackets on each link material



Features

Material

Steel quality:

S250GD + Z275 according to DIN EN10346

Corrosion protection:

275 g / m galvanized on both sides 20mm

Benefits

- **Connection through a variety of screws, nails and mechanical anchors. applicable materials**
- **suitable for connections wood-wood, concrete, steel**


Applications

Applicatons

- **For timber-to-timber connections with smaller dimensions, installation of windows, sills**

Scope


- For timber-to-timber connections with smaller dimensions, e.g. purlins on the main beams, installation of windows

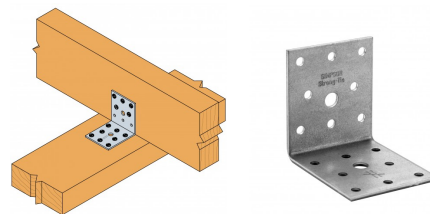

AB55365

AB55365

Technical Data

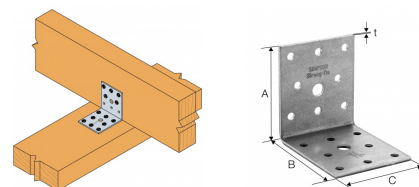

Product Dimensions

References	Tun / DB nr.	NOB nr.	Product Dimensions [mm]				Joist		Holes flange B		Box Quantity
			A	B	C	t	Ø5 [mm]	Ø8,5 [mm]	Ø5 [mm]	Ø8,5 [mm]	
AB55365	1386018	42948106	65	65	55	2.5	8	1	8	1	100


AB55365

AB55365

Installation

Fasteners

- Connecting with screws or nails CSA5,0xI CNA4,0xI
- For installation in concrete use anchor bolts M8

AB55365
AB55365