

Technical data sheet

SIMPSON

Strong-Tie

66L

L bracket 66L

Cost-effective solution for positioning against a shifting girders and beams.

Features

Material

Steel quality:

S 250 GD + Z 275 according to DIN EN

Corrosion protection:

275 g / m galvanized on both sides 20mm

Benefits

- **Cost-effective solution for positioning against a shifting girders and beams.**




Applications

Header member

Wood, wood products

For Use With


- **Designed for home and garden**

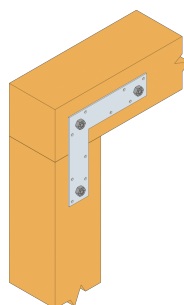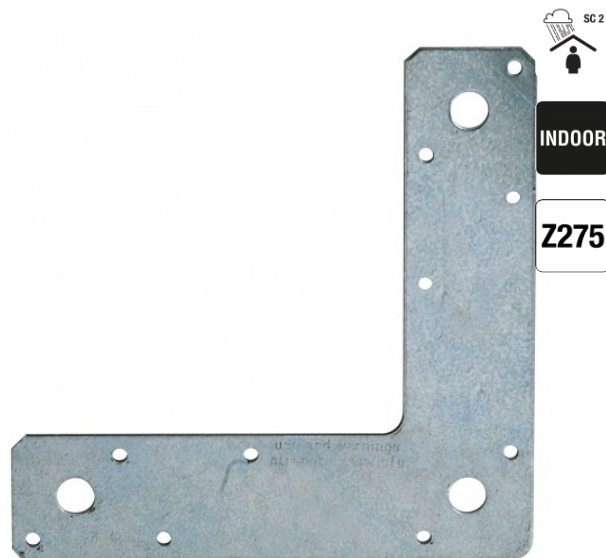

Fixation à 90° avec 66L

66L
L bracket 66L

Technical Data

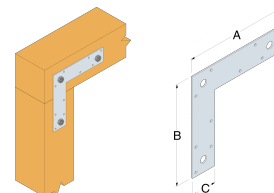

Dimensions

References	Dimensions [mm]				Perçages [mm]		Quantité par boîte
	A	B	C	Ep.	Nb.	Diamètre	
66L	38	150	150	2	10	Ø4 + 3 Ø11	-

66L

L bracket 66L


Installation

Fixing

- **Connection to the timber is made CNA nails or screws \varnothing 10th**

Installation

1. Approcher l'élément à fixer du support.
2. Pointer la ferrure sur l'élément à fixer.
3. Pointer la ferrure sur le support bois.



Fixation à 90° avec 66L

66L

L bracket 66L