

Technical data sheet

SIMPSON

Strong-Tie

BT4

Concealed joist hanger BT4

The concealed beam hangers BT4 are used for invisible connections between supported beams and supporting beams or post.

Features

Material

Steel quality:

S 250 GD + Z 275 according to DIN EN 10346

Corrosion protection:

275 g / m galvanized on both sides 20mm

Benefits

- The connection can be made up to 45 °.
- Shoes BT4 are particularly suitable for timber-to-timber connection, in which the fibers are perpendicular (e.g. columns)
- Mounting hole allows safe and comfortable hanging beam.
- In the shoe does not need additional support
- Fire protection according to DIN 4102nd





Applications

Applications

- Wood, wood products

Scope

- For connecting secondary beams of wood or wooden materials to the main support structure of wood / wood materials




BT4

Concealed joist hanger BT4

Technical Data

Product Dimensions

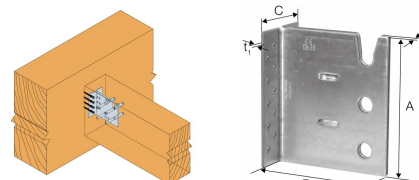

References	Tun / DB nr.	NOB nr.	Product Dimensions [mm]					Joist Size [mm]		Header holes	Joist holes	Box Quantity	Weight [kg]
			A	B	C	t ₁	t ₂	Width	Height	Ø5	Ø13		
								Min	Min β=0				
BT4-90-B	3965068	21593637	90	106	61	3	6	60	90	16	4 (Ø8.5)	25	0.54
BT4-120-B	3965076	42277124	120	106	61	3	6	60	152	20	3	25	0.72
BT4-160-B	3965084	42277143	160	106	61	3	6	60	192	28	4	20	0.95
BT4-200-B	3965092	21593660	200	106	61	3	6	60	232	36	5	15	1.2
BT4-240-B	3965100	21593678	240	106	61	3	6	60	272	44	6	15	1.4


HT = Main beam or support

Combined value:

$$\sum \frac{F_{i,d}}{R_{i,d}} \leq 1$$

For angled connections, the resistance must reckon with multiplier.

Wood/wood fastening- Characteristic values in kn



References	Product Capacities															
	Number of Fasteners				Product characteristic capacities - Timber C24 [kN]											
	Header		Joist		R _{1,k}						R _{2,k}					
	Qty	Type	Qty	Type	Dowels length [mm]						Dowels length [mm]					
					60	80	100	120	140	160	60	80	100	120	140	160
BT4-90-B	16	CNA4.0x50	4	STD8	10.8	11.8	12.9	13.7	13.7	13.7	8.1	8.9	9.7	10.3	10.3	10.3
BT4-120-B	20	CNA4.0x50	3	STD12	17.3	18.2	19.4	20.7	22.3	23.9	11.5	12.1	12.9	13.8	14.9	15.9
BT4-160-B	28	CNA4.0x50	4	STD12	28	29.5	31.2	33.3	35.7	38.2	21	22.1	23.4	25	26.8	28.6
BT4-200-B	36	CNA4.0x50	5	STD12	39.8	41.9	44.3	47.2	50.4	53.9	31.8	33.5	35.4	37.8	40.3	43.1
BT4-240-B	44	CNA4.0x50	6	STD12	52.2	54.9	57.9	61.7	65.9	70.3	43.5	45.8	48.2	51.4	54.9	58.6

The joist shall have as minimum a width = length of steel dowel.

For beams with a slope β the capacities shall be multiply with the factor.

β	0°	15°	30°	45°
factor	1.0	0.95	0.9	0.85

R_{2,k} capacities are calculated as R_{2,k} = R_{1,k} x (nb of dowels - 1) / (nb of dowels).

The top dowel is not considered for the uplift capacities as it is placed in an open hole.


More detailed information are given in the ETA.

Technical data sheet



BT4 Concealed joist hanger BT4


Product characteristic capacities - Timber beam to timber beam - $R_{3,k}$ and $R_{4,k}$



References	Product Capacities										
	Number of Fasteners				Product characteristic capacities - Timber C24 [kN]						
	Header		Joist		R _{3,k}						R _{4,k}
	Qty	Type	Qty	Type	Dowels length [mm]						
					60	80	100	120	140	160	
BT4-90-B	16	CNA4.0x50	4	STD8	1.5	1.9	2.3	2.7	3.1	3.6	7.8
BT4-120-B	20	CNA4.0x50	3	STD12	2.2	2.9	3.5	4.2	4.8	5.6	9.8
BT4-160-B	28	CNA4.0x50	4	STD12	2.9	3.6	4.4	5.3	6.2	7	13.7
BT4-200-B	36	CNA4.0x50	5	STD12	3.5	4.4	5.4	6.4	7.4	8.4	17.6
BT4-240-B	44	CNA4.0x50	6	STD12	4.2	5.3	6.4	7.4	8.6	9.8	21.6

The joist shall have as minimum a width = length of steel dowel.
The capacities R_4 are for all length of steel dowel.

Product characteristic capacities - Timber beam to timber post



References	Product characteristic capacities - Timber beam to timber post - partial nailing																
	Number of Fasteners				Post width	Product characteristic capacities - Timber C24 [kN]											
	Header		Joist			Min	R _{1,k}						R _{2,k}				
	Qty	Type	Qty	Type	Dowels length [mm]						Dowels length [mm]						
					60		80	100	120	140	160	60	80	100	120	140	160
BT4-90-B	8	CNA4.0x50	4	STD8	86		9	9.9	10.9	11.6	11.6	11.6	6.8	7.4	8.2	8.7	8.7
BT4-120-B	12	CNA4.0x50	3	STD12	86	14.6	15.5	16.6	17.9	19.4	20.7	9.7	10.3	11.1	11.9	12.9	13.8
BT4-160-B	16	CNA4.0x50	4	STD12	86	22.9	24.4	26	27.9	30	32	17.2	18.3	19.5	20.9	22.5	24
BT4-200-B	20	CNA4.0x50	5	STD12	86	32	34.1	36.2	38.7	41.2	43.4	25.6	27.3	29	31	33	34.7
BT4-240-B	24	CNA4.0x50	6	STD12	86	41.6	44.3	46.8	49.7	52.3	53.2	34.7	36.9	39	41.4	43.6	44.3

The joist shall have as minimum a width = length of steel dowel.

For beams with a slope β the capacities shall be multiply with the factor.

β	0°	15°	30°	45°
factor	1.0	0.95	0.9	0.85

The capacities from this table are also valid for partial nailing beam to beam.

$R_{2,k}$ capacities are calculated as $R_{2,k} = R_{1,k} \times (\text{nb of dowels} - 1) / (\text{nb of dowels})$.

The top dowel is not considered for the uplift capacities as it is placed in an open hole.

More detailed information are given in the ETA.


Technical data sheet

SIMPSON

Strong-Tie

BT4

Concealed joist hanger BT4



Product characteristic capacities - Timber beam to timber post - $R_{3,k}$ and $R_{4,k}$

References	Product characteristic capacities - Timber beam to timber post - partial nailing											
	Number of Fasteners				Post width	Product characteristic capacities - Timber C24 [kN]						
	Header		Joist		Min	R _{3,k}						R _{4,k}
	Qty	Type	Qty	Type		Dowels length [mm]						
						60	80	100	120	140	160	
BT4-90-B	8	CNA4.0x50	4	STD8	86	1.5	1.9	2.3	2.7	2.7	2.7	3.9
BT4-120-B	12	CNA4.0x50	3	STD12	86	2.2	2.9	3.5	4.2	4.8	5.6	5.9
BT4-160-B	16	CNA4.0x50	4	STD12	86	2.9	3.6	4.4	5.3	6.2	7	7.8
BT4-200-B	20	CNA4.0x50	5	STD12	86	3.5	4.4	5.4	6.4	7.4	8.4	9.8
BT4-240-B	24	CNA4.0x50	6	STD12	86	4.2	5.3	6.4	7.4	8.6	9.8	11.8

The joist shall have as minimum a width = length of steel dowel.
The capacities $R_{4,k}$ are for all length of steel dowel.







BT4

Concealed joist hanger BT4

Installation

Fasteners

- CNA4,0 × L Nails
- Or CSA5,0 x L screws and dowels Ø12mm



BT4

Concealed joist hanger BT4