

## A35E Framing Anchors

*The A35E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections.*

• *Balanced, completely reversible design allows the A35E to be used to secure a wide variety of connections.*

### Features

#### Material

- Pre-galvanised mild steel.

#### Benefits

- Speed prong holds framing anchor in position to allow easier nailing,
- Exclusive bending slots allow instant, accurate bending on site for all two and three-way ties.
- Balanced, completely reversible design allows the A35 to be used for a wide variety of connections.




### Applications

#### Suitable On

- Wood to wood applications.

#### Domaines d'utilisation

.

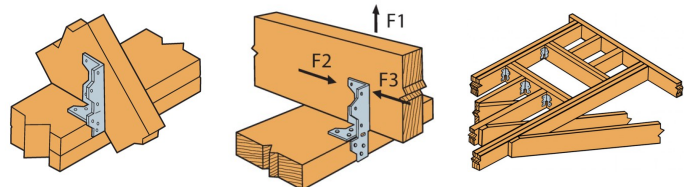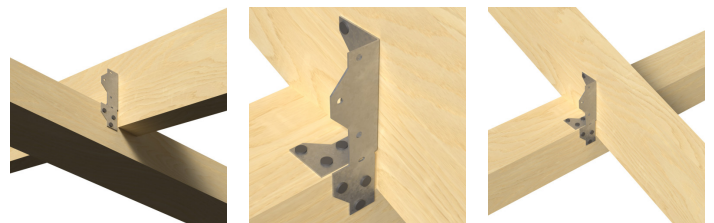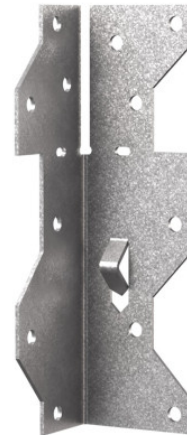


A35

A35E  
Framing Anchors


## Technical Data

### Product Dimensions

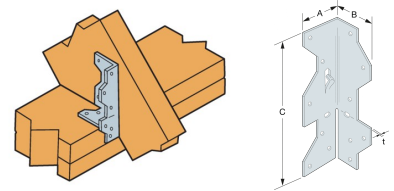

References	Product Dimensions [mm]					Holes			
	A	B	C	E	t	Flange A		Flange B	
						Ø3,8	Ø2,4x4,8	Ø3,8	Ø2,4x4,8
A35E	33	33	114	39	1.2	6	1	6	1

Product capacities - Timber to timber - Full nailing - 2 brackets

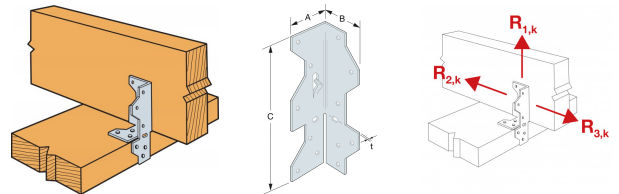

References	Product capacities - Timber to timber - Full nailing					
	Fasteners		Characteristic capacities - Timber C24 - 2 angle brackets per connection [kN]			
	Flange A	Flange B	$R_{1,k}$		$R_{2,k} = R_{3,k}$	
	N3.75x30	N3.75x30	CNA3.1x35	N3.75x30	CNA3.1x35	N3.75x30
A35E	6	6	4.6	1.3	3.1	0.89

A35E  
Framing Anchors







## Installation

Fixing

Install with 3.75X30mm square twist nails.

Installation

Use all specified fasteners



A35E  
Framing Anchors

