

## Technical data sheet

**SIMPSON**

**Strong-Tie**

### BANS / BANW Punched straps

Punched straps for constructive purposes, such as cable fasteners or pipe hangers.  
Practilettband is available in 4 dimensions on reel with a length of 10 m.

## Features

### Material

- Produced of galvanized steel

## Applications

### When to Use

- For pipe fittings and other types of suspension
- For connections in wood for hobby purposes

**Practilettbands must not be used for stiffening and anchoring in building structures (for this purpose wind straps must be used).**




BANS



BANW




BANS-H5



BANS / BANW  
Punched straps

## Technical Data

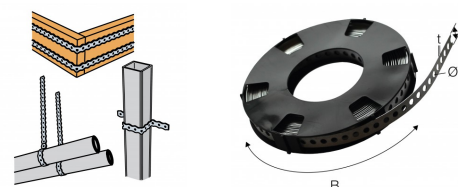

Dimensions and drill holes

References	Tun / DB nr.	NOB nr.	Dimensions and drill holes				Weight [kg]
			A [mm]	B [m]	t [mm]	Holes Ø	
BANW071210	1761814	49004196	12	10	0.7	5	0.49
BANW071710	1761819	49004480	17	10	0.7	7	0.7
BANW071725	1761821	49004525	17	25	0.7	7	1.6

BANS / BANW  
**Punched straps**

## Installation

### Fixing

- Fasteners must be adapted to the tape thickness, the hole sizes and the material to be connected by the band.

BANS / BANW  
**Punched straps**

