


NPHWS

**Ringnagel kop met witte polymeercoating - Rvs A4**

*De ringnagel rvs A4 kop met witte polymeercoating NPHWS wordt voornamelijk gebruikt voor het bevestigen van pvc-gevelbekleding.*

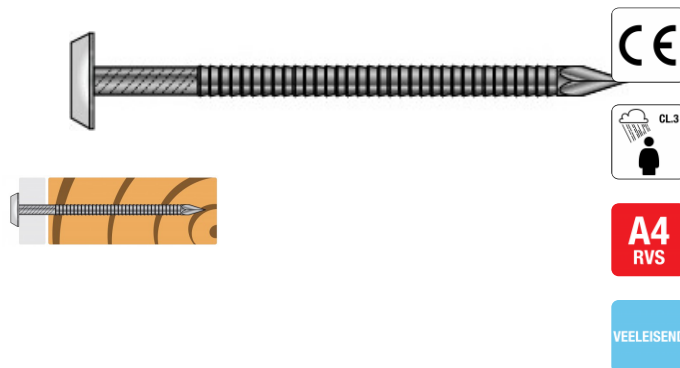

## Kenmerken

### Materiaal

- **Schroef** : roestvrij staal A4 (316) overeenkomstig NF EN 10088,
- **Witte overgeverfde kop** : polymeer.

### Voordelen

- Betere uittrekkraft door het geringde lichaam,
- Kop met onbreekbare witte polymeercoating,
- Kop met weerbestendige en uv-bestendige polymeercoating.

## Toepassingen

### Ondergrond

- Bevestiging van pvc op hout,
- Bevestiging van randplanken op hout.


### Gebruik

- Pvc-gevelbekledingen,
- Profielen van deuren en ramen,
- Mobilhomes,
- Gevels.

NPHWS

Ringnagel kop met witte polymeercoating - Rvs A4

## Technische gegevens

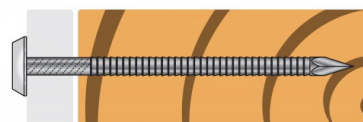

Afmetingen en karakteristieke waarden

| Referentie   | Fastener dimensions [mm] |    |                | Gewicht [kg] |
|--------------|--------------------------|----|----------------|--------------|
|              | d                        | l  | d <sub>h</sub> |              |
| NPHWS2.00X30 | 2                        | 30 | 6              | 0.001        |
| NPHWS2.00X40 | 2                        | 40 | 6              | 0.001        |
| NPHWS2.65X50 | 2.7                      | 50 | 9              | 0.003        |
| NPHWS3.35X65 | 3.4                      | 65 | 12             | 0.004        |

Product characteristic properties

| Referentie   | Product characteristic properties                          |                                                                                                        |                                                                                                 |                                                                      |
|--------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
|              | Characteristic Yield Moment – $M_{y,k}$ [ $M_{y,k}$ ] [Nm] | Characteristic withdrawal parameter - $f_{ax,k,90^\circ}$ [ $f_{ax,k,90^\circ}$ ] [N/mm <sup>2</sup> ] | Characteristic head pull-through parameter - $f_{head,k}$ [ $f_{head,k}$ ] [N/mm <sup>2</sup> ] | Characteristic tensile capacity - $f_{tens,k}$ [ $f_{tens,k}$ ] [kN] |
| NPHWS2.00X30 | 4.6                                                        | 11.4                                                                                                   | 9.3                                                                                             | 5.6                                                                  |
| NPHWS2.00X40 | 4.6                                                        | 11.4                                                                                                   | 9.3                                                                                             | 5.6                                                                  |
| NPHWS2.65X50 | 4.6                                                        | 11.4                                                                                                   | 9.3                                                                                             | 5.6                                                                  |
| NPHWS3.35X65 | 4.6                                                        | 11.4                                                                                                   | 9.3                                                                                             | 5.6                                                                  |

