

GAR Anti-rodent mesh

The Anti Rodent Mesh allow a good ventilation of the cladding and prevent rodent and insect from coming inside.

Egenskaper

Materiale

- Steel S250GD,
- Finish ZM310 MBC U.

Fordeler

- Diameter of the holes are 3mm : it prevent most of the insect to enter,
- Mesh provided in 25m roller: stock and transportation is simplified, reduction of drop and overlap when in bars,
- Finish equivalent to stainless steel A2: good resistance to corrosion
- Conform to french standard DTU41.2 for ventilation.





Anvendelse

Skjøter

- Solid timber, Engineered timber, glulam.

Intend of Use


- Timber frame,
- Cladding.

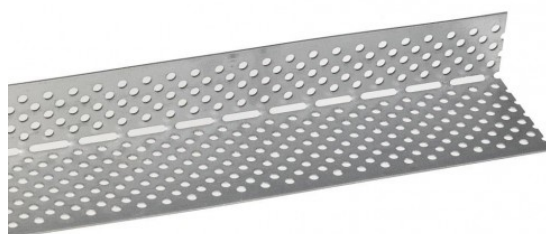

GAR
Anti-rodent mesh

Teknisk data

Dimensjoner



| Art. nr. | NOBB nr. | Folded dimensions [mm] | | Flat dimensions | | | Huller [mm] | |
|-------------|----------|------------------------|----|-----------------|------------------|---------------|-------------|--------------|
| | | B | C | Bredd [mm] | Total lengde [m] | Tykkelse [mm] | Round | Avlangt hull |
| GAR22/45/25 | 51166080 | 45 | 22 | 67 | 25 | 0.8 | Ø 3 | Ø 3 x 12 |
| GAR25/42/25 | 51166095 | 42 | 25 | 67 | 25 | 0.8 | Ø 3 | Ø 3 x 12 |
| GAR | - | - | - | - | - | - | - | - |
| GAR27/40/25 | - | 40 | 27 | 67 | 25 | 0.8 | Ø 3 | Ø 3 x 12 |
| GAR30/70/25 | - | 70 | 30 | 100 | 25 | 0.8 | Ø 3 | Ø 3 x 12 |
| GAR40/60/25 | - | 60 | 40 | 100 | 25 | 0.8 | Ø 3 | Ø 3 x 12 |

GAR
Anti-rodent mesh

Montering

How to choose

- **GAR22/45/25** : for stud of 22mm or two 22mm = **44mm**.
- **GAR25/42/25** : for stud **25 mm** or **27 mm** or two studs **27+18 = 45 mm**.

Complementary notes

The Anti Rodent Mesh is packaged as 25m roller. It must be cut and folded in house or on site. The oblong holes correspond to the folded line. Gloves and glasses must be used to use this product.

Innfesting

The fasteners used to fix the GAR to the stud are CNA2.5x35

