



The PPA is for post base installations requiring a higher standoff distance.



[ETA-07/0285](#), [UK-DoP-e07/0285](#)

## FEATURES




### Material

- Steel S235JR according to NF EN 10025
- Hotdip galvanized according to NF EN ISO 1461

### Benefits

- No machining necessary

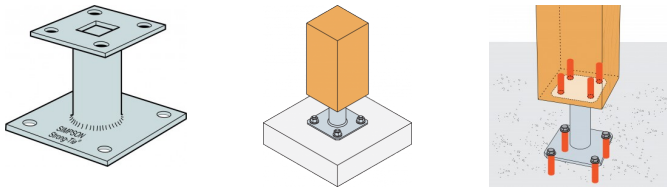

## APPLICATIONS

### Header member



- **Supporting member:** solid wood, glued-laminated wood, concrete
- **Supported member:** solid wood, composite lumber, glued-laminated wood

### Applications

- Awning posts
- Pergola
- Veranda




TECHNICAL DATA

Product Dimensions



References	Product Dimensions [mm]							Top plate holes	Bottom plate holes
	A	B	D	E	F	G	t	Ø12	Ø12
PPA100	100	100	130	130	100	48.3	4	4	4

Product simplified characteristic capacities



References	Simplified product capacities - Timber to Concrete				
	Number of Fasteners				Simplified characteristic capacities - Timber C24 [kN]
	On post		On concrete		
	Qty	Type	Qty	Type	$R_{1,k}^*$
PPA100	4	LAG Ø10x80	4	Ø10**	85.7

\*The published characteristic capacity is based on medium term load duration and service class 3 according to EC5 (EN 1995)( $k_{mod} = 0.7$ ). For other load duration and service class, please refer to the ETA to get more accurate capacities.

\*\* Refer to the Simpson Strong-Tie anchor product range for suitable anchors. Typical anchor solutions are SET-XP and AT-HP, depending on the concrete type, spacing and edge distances.

## INSTALLATION

### Fixing

#### **On post:**

- Bolts
- LAG lag screws 10 x 80 mm

#### **On concrete:**

- Mechanical anchor: WA M10-78/5 pin
- Chemical anchor: AT-HP resin + LMAS M10-120/25 threaded rod

### Installation

Fix to the foundation with concrete screw/mechanical anchor or resin anchor system. Fix to the post using M10 coach screws.

- Not recommended when the top of post/column is not restrained (e.g. fence post)


**ATTENTION:** Post with maximum cross-section 200 x 200 mm.

The bases are always installed in the same direction:

- Plate 130 x 130 mm on the ground.
- Plate 100 x 100 mm fastened on the post.

**PPRC** can be adjusted with a 30 mm wrench after both the plates are attached.

**PPRIX** requires the use of stainless steel fasteners.

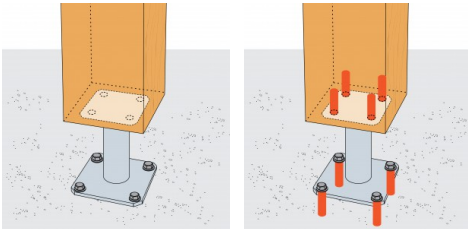

Fixations  
utilisées pour  
ped de poteau  
type PPA