



The HB is a joist hanger for supporting I-joists and structural composite timber from timber headers. The HB is designed especially for use with single ply headers of thickness 89mm or more.

[ETA-17/0554](#), [UK-DoP-e17/0554](#)

FEATURES

Material

- Pre-galvanised mild steel

Installation


- Use all specified fasteners. Verify that the header can take the required fasteners specified in the table.
- Web stiffeners are required for use with the HB hanger styles.
- The HB hanger may be used for weld on applications. The minimum required weld for the top flanges is a 3.0 x 50mm fillet weld on each side of the top flange tabs.
- Weld-on applications produce maximum allowable loads listed.
- Uplift loads do not apply for this application.
- Special considerations should be taken when welding galvanised steel.

Options

- Other widths and heights are available as a special order, contact factory for details.
- HB series hangers can be skewed and sloped to a maximum of 45°. See table for load adjustment factors.



Options

- Other widths and heights are available as a special order, contact factory for details.
- HB series hangers can be skewed and sloped to a maximum of 45°. See table for load adjustment factors.

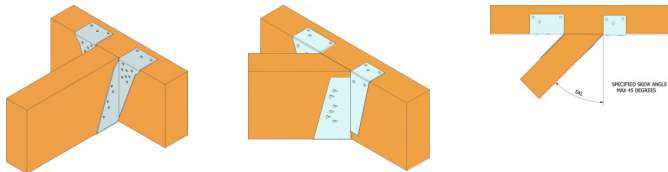

TECHNICAL DATA

Product Dimensions

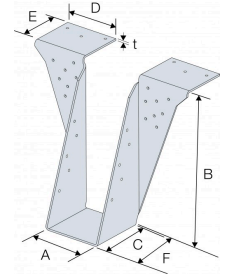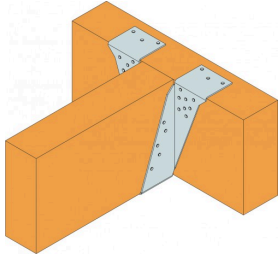

References	Joist Size [mm]		Product Dimensions [mm]							Header holes	Joist holes
	Width	Height	A	B	C	D	E	F	t	Ø4.3 [mm]	Ø4.3 [mm]
HB195/92	90	195	92	195	90	90	75	93	3	22	10
HB200/92	90	200	92	200	90	90	75	93	3	22	10
HB220/92	90	220	92	220	90	90	75	93	3	22	10
HB235/92	90	235	92	235	90	90	75	93	3	22	10
HB240/92	90	240	92	240	90	90	75	93	3	22	10
HB245/92	90	245	92	245	90	90	75	93	3	22	10
HB300/92	90	300	92	300	90	90	75	93	3	22	10
HB350/92	90	350	92	350	90	90	75	93	3	22	10
HB400/92	90	400	92	400	90	90	75	93	3	22	10
HB200/118	116	200	118	200	90	90	75	93	3	22	10
HB300/118	116	300	118	300	90	90	75	93	3	22	10
HB350/118	116	350	118	350	90	90	75	93	3	22	10
HB406/118	116	406	118	406	90	90	75	93	3	22	10
HB195/135	133	195	135	195	90	90	75	93	3	22	10
HB220/135	133	220	135	220	90	90	75	93	3	22	10
HB235/135	133	235	135	235	90	90	75	93	3	22	10
HB245/135	133	245	135	245	90	90	75	93	3	22	10
HB300/135	133	300	135	300	90	90	75	93	3	22	10
HB350/135	133	350	135	350	90	90	75	93	3	22	10
HB400/135	133	400	135	400	90	90	75	93	3	22	10
HB450/135	133	450	135	450	90	90	75	93	3	22	10
HB200/142	140	200	142	200	90	90	75	93	3	22	10
HB300/142	140	300	142	300	90	90	75	93	3	22	10
HB350/142	140	350	142	350	90	90	75	93	3	22	10
HB195/146	144	195	146	195	90	90	75	93	3	22	10
HB220/146	144	220	146	220	90	90	75	93	3	22	10
HB235/146	144	235	146	235	90	90	75	93	3	22	10
HB245/146	144	245	146	245	90	90	75	93	3	22	10
HB300/146	144	300	146	300	90	90	75	93	3	22	10
HB350/146	144	350	146	350	90	90	75	93	3	22	10
HB400/146	144	400	146	400	90	90	75	93	3	22	10
HB195/152	150	195	152	195	90	90	75	93	3	22	10
HB220/152	150	220	152	220	90	90	75	93	3	22	10
HB235/152	150	235	152	235	90	90	75	93	3	22	10
HB245/152	150	245	152	245	90	90	75	93	3	22	10
HB300/152	150	300	152	300	90	90	75	93	3	22	10
HB350/152	150	350	152	350	90	90	75	93	3	22	10
HB400/152	150	400	152	400	90	90	75	93	3	22	10
HB450/152	150	450	152	450	90	90	75	93	3	22	10
HB195/180	178	195	180	195	90	90	75	93	3	22	10
HB220/180	178	220	180	220	90	90	75	93	3	22	10

References	Joist Size [mm]		Product Dimensions [mm]							Header holes	Joist holes
	Width	Height	A	B	C	D	E	F	t	Ø4.3 [mm]	Ø4.3 [mm]
HB235/180	178	235	180	235	90	90	75	93	3	22	10
HB240/180	178	240	180	240	90	90	75	93	3	22	10
HB300/180	178	300	180	300	90	90	75	93	3	22	10
HB350/180	178	350	180	350	90	90	75	93	3	22	10
HB356/180	178	356	180	356	90	90	75	93	3	22	10
HB400/180	178	400	180	400	90	90	75	93	3	22	10
HB406/180	178	406	180	406	90	90	75	93	3	22	10

HB onto I-joists

References	Installation	Product capacities - HB onto I-Joist											
		Number of Fasteners						Safe Working Loads [kN]			Characteristic Capacities [kN]		
		Header				Joist		R _{1,SWL,Long Term}		R _{2,SWL, Short Term}	R _{1,k}		R _{2,k}
		Top Qty	Type	Face Qty	Type	Qty	Type	I-Joist Headers with LVL Flanges ≥ 35mm	I-Joist Headers with Solid Sawn Flanges ≥ 45mm		I-Joist Headers with LVL Flanges ≥ 35mm	I-Joist Headers with Solid Sawn Flanges ≥ 45mm	
HB	Backer Blocks	6	N3.75x30	16	N3.75x30	10	N3.75x30	12.9	13.6	5	30.2	30.2	8.8

HB onto Solid Joists

References	HB onto Solid Joists											
	Number of Fasteners							Safe Working Loads [kN]			Characteristic Capacities [kN]	
	Header				Joist		R _{1,SWL, Long Term}		R _{2,SWL, Short Term}	R _{1,k}		R _{2,k}
	Top Qty	Type	Face Qty	Type	Qty	Type	C16	LVL		C16	LVL	
HB	6	N3.75x75	16	N3.75x75	10	N3.75x75	16.9	26.4	6.9	40.7	40.7	13.1

HB onto Timber Nailers (38-74mm)

References	HB onto Timber Nailers 38-74 mm									
	Number of Fasteners						Safe Working Loads [kN]		Characteristic Capacities [kN]	
	Header				Joist		R _{1,SWL,Long Term}	R _{2,SWL,Short Term}	R _{1,k}	R _{2,k}
	Top Qty	Type	Face Qty	Type	Qty	Type	N3.75x30	N3.75x30	N3.75x30	N3.75x30
HB	6	N3.75x30	4	N3.75x30	10	N3.75x30	8.4	1.8	20.2	3.5

HB onto Timber Nailers (75-100mm)

References	HB onto Timber Nailers 75-100 mm									
	Number of Fasteners						Safe Working Loads [kN]		Characteristic Capacities [kN]	
	Header				Joist		R _{1,SWL,Long Term}	R _{2,SWL,Short Term}	R _{1,k}	R _{2,k}
	Top Qty	Type	Face Qty	Type	Qty	Type	N3.75x75	N3.75x75	N3.75x75	N3.75x75
HB	6	N3.75x75	12	N3.75x75	10	N3.75x30	14.6	4.4	35.1	8.8

HB Skew & Slope Adjustment Factors

References	HB Skew & Slope Adjustable Factors				
	Sloped Down	Sloped Up	Skewed	Sloped Down & Skewed	Sloped Up & Skewed
HB	0.9	0.7	0.96	0.59	0.7

