

RSNCZ

### Ramme-søm 15° trådrulle - Rund hoved, ring skaft - Elektro galvaniseret

*The framing nail is designed for wood to wood constructions and can be used in indoor environments. The coil collation gives more nails in the magazine and reduce the need of reloading. The ring shank increases the withdrawal capacity.*

### Egenskaber


#### Features:

- Rundt hoved
- Høj udtrækningskapacitet
- Ringformet gevind
- Trådrulle 15°

### Anvendelse

#### Application:

- Framing wood to wood


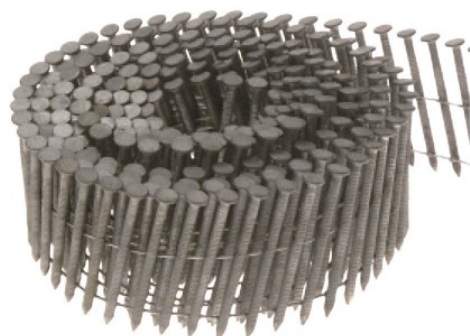


RSNCZ

**Ramme-søm 15° trådrulle - Rund hoved, ring skaft -  
Elektro galvaniseret**


## Teknisk data

Product dimensions



Art. nr.	Item code	DB nr.	NOBB nr.	Fastener dimensions [mm]									Qty/box	Vægt [kg]
				d	l	d <sub>h</sub>	A <sub>h</sub>	h <sub>t</sub>	l <sub>g</sub>	l <sub>p</sub>	t <sub>fix</sub>			
RSNC15Z3.1x65	75669	2056022	55839522	3.1	64.5	6.9	37.4	0.8	41	4.3	40.2	1600	0.005	

Product characteristic properties



Art. nr.	Product characteristic properties			
	Characteristic Yield Moment – $M_{y,k}$ [ $M_{y,k}$ ] [Nm]	Characteristic withdrawal parameter – $f_{ax,k,90^\circ}$ [ $f_{ax,k,90^\circ}$ ] [ $N/mm^2$ ]	Characteristic head pull-through parameter – $f_{head,k}$ [ $f_{head,k}$ ] [ $N/mm^2$ ]	Characteristic tensile capacity – $f_{tens,k}$ [ $f_{tens,k}$ ] [kN]
RSNC15Z3.1x65	4.6	8.3	18.1	3.8

