

NPHWS

Ringnagel kop met witte polymeercoating - Rvs A4

De ringnagel rvs A4 kop met witte polymeercoating NPHWS wordt voornamelijk gebruikt voor het bevestigen van pvc-gevelbekleding.

Kenmerken

Materiaal

- **Schroef** : roestvrij staal A4 (316) overeenkomstig NF EN 10088,
- **Witte overgeverfde kop** : polymeer.

Voordelen

- Betere uittrekkraft door het geringde lichaam,
- Kop met onbreekbare witte polymeercoating,
- Kop met weerbestendige en uv-bestendige polymeercoating.


Toepassingen

Ondergrond

- Bevestiging van pvc op hout,
- Bevestiging van randplanken op hout.

Gebruik

- Pvc-gevelbekledingen,
- Profielen van deuren en ramen,
- Mobilhomes,
- Gevels.

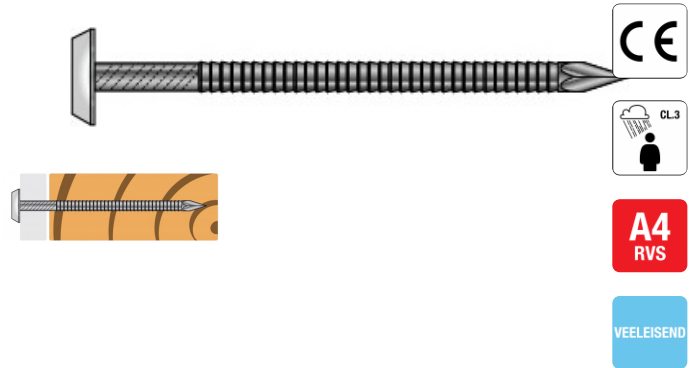

NPHWS
Ringnagel kop met witte polymeercoating - Rvs A4

Technische gegevens



Afmetingen en karakteristieke waarden

Referentie	Fastener dimensions [mm]		
	d	l	dh
NPHWS2.00X30	2	30	6
NPHWS2.00X40	2	40	6
NPHWS2.65X50	2.7	50	9
NPHWS3.35X65	3.4	65	12

Product characteristic properties

Referentie	Product characteristic properties			
	Characteristic Yield Moment – $M_{y,k}$ [$M_{y,k}$] [Nm]	Characteristic withdrawal parameter - $f_{ax,k,90^\circ}$ [$f_{ax,k,90^\circ}$] [N/mm^2]	Characteristic head pull-through parameter - $f_{head,k}$ [$f_{head,k}$] [N/mm^2]	Characteristic tensile capacity - $f_{tens,k}$ [$f_{tens,k}$] [kN]
NPHWS2.00X30	4.6	11.4	9.3	5.6
NPHWS2.00X40	4.6	11.4	9.3	5.6
NPHWS2.65X50	4.6	11.4	9.3	5.6
NPHWS3.35X65	4.6	11.4	9.3	5.6

