

EFIXR

Vinkler med aflange huller

EFIXR beslag er små vinkelbeslag som er anvendelige til en række lette gør-set-selv installationer. De aflange huller betyder at man kan efterjustere beslagene hvis underlaget rykker sig under montagen.

Egenskaber

Materiale

- Stålkvalitet:
Galvaniseret stål S250GD + Z275 i henhold til EN 10346

Fordele

- De to aflange huller gør monteringen nemmere


Anvendelse

Samlinger

- **Supporting member type:** wood, concrete, metal, PVC.
- **Supported member type:** wood, concrete, metal, PVC.

Anvendelsesområder


- Anvendelige til en række lette gør-set-selv installationer

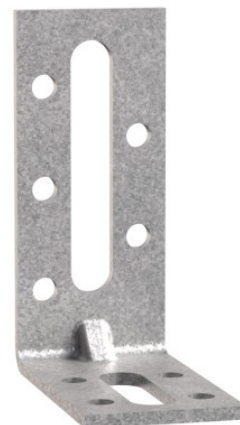

EFIXR

Vinkler med aflange huller

Teknisk data

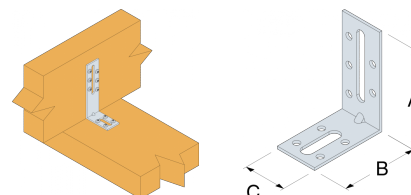

Mål

Art. nr.	Dimensioner [mm]				Huller flig A			Huller flig B		Vægt [kg]
	A	B	C	t	Ø5	Ø6.5x30	Ø6.5x55	Ø5	Ø8,5x30	
EFIXR553	50	54	30	2	4	1	-	4	1	0.04
EFIXR853A	80	55	30	2.5	6	-	1	4	1	0.06

EFIXR

Vinkler med aflange huller

Montering

Fastgørelse

- Til fastgørelse på træ anvendes CNA4,0xℓ kamsøm eller CSA5,0xℓ beslagskruer

Monteringsvejledning

1. Set in position the fixture on the base material
2. Place the bracket on the fixture and secure it with appropriate nail or screw set in the oblong hole.
3. On timber base material, use appropriate nail or screw in the oblong hole, then when the position of the fixture is adjusted, set nail(s) or screw(s) in the round holes.
4. On concrete base material, use appropriate anchor in the oblong hole, then when the position of the fixture is adjusted, set nail(s) or screw(s) in the round holes on the fixture.

