

Technical data sheet

CNAC15-G

Connector Nail 15-16° Plastic Coil - Round head, Ring Shank HDG

SIMPSON

Strong-Tie

Hot dip galvanised plastic coil collated CNA connector nails fit in most common nail guns on the market with a angle of the nail of 15-16°.

Features

Advantages

- The conical shape under the head ensures that the nail is fully in contact with the hole
- High withdrawal capacity
- Hot dip galvanised
- Annular ring thread
- Plastic coil 15-16°


Applications

Support

- Connectors to wood

Compatible tools

*

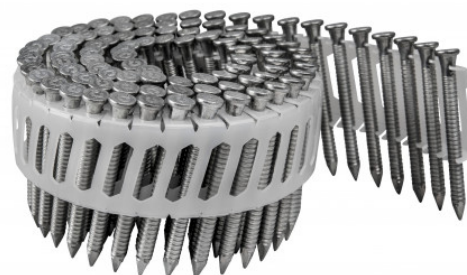

NEW

CE

SC 3

ETA

OUTDOOR

GALVA

Technical data sheet


SIMPSON

Strong-Tie®

CNAC15-G

Connector Nail 15-16° Plastic Coil - Round head, Ring Shank HDG

Technical Data

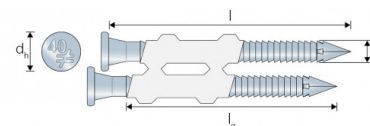

Product dimensions

References	Item Nr.	DB nr.	Fastener dimensions					Qty per coil	Qty per box	Weight [kg]
			d	l	lg	dh	ht			
CNAC15G4.0X40	76142	2124154	4	40	25	7	1.5	100	1200	0.005
CNAC15G4.0X50	76143	2124155		50	35	7	1.5	100	1200	0.006
CNAC15G4.0X60	76144	2124156		60	45	7	1.5	100	1200	0.007

Characteristic capacities

References	Characteristic capacities - Timber C24 acc to ETA-04/0013 [kN]	
	$R_{ax,k}$	$R_{lat,k}$
CNAC15G4.0X40	0.7	1.9
CNAC15G4.0X50	1	2.2
CNAC15G4.0X60	1.2	2.4

Capacities are for 2mm thick steel plates and Grade C24 timber. Please refer to ETA-04/0013 for capacities of other thickness and timber grades

CNAC15-G

Connector Nail 15-16° Plastic Coil - Round head, Ring Shank HDG



SIMPSON

Strong-Tie®